

LFD

Available Size : **32** **43** **49**
(In inches)



**Ultra High
Definition:
Upto 4K**



**Landscape &
Portrait Mode**



**Stable &
Reliable
24x7 Display**



**In-Build
Media Players**





**High Brightness
350-500 NITS**



**Smart
Platform**

APPLICATION

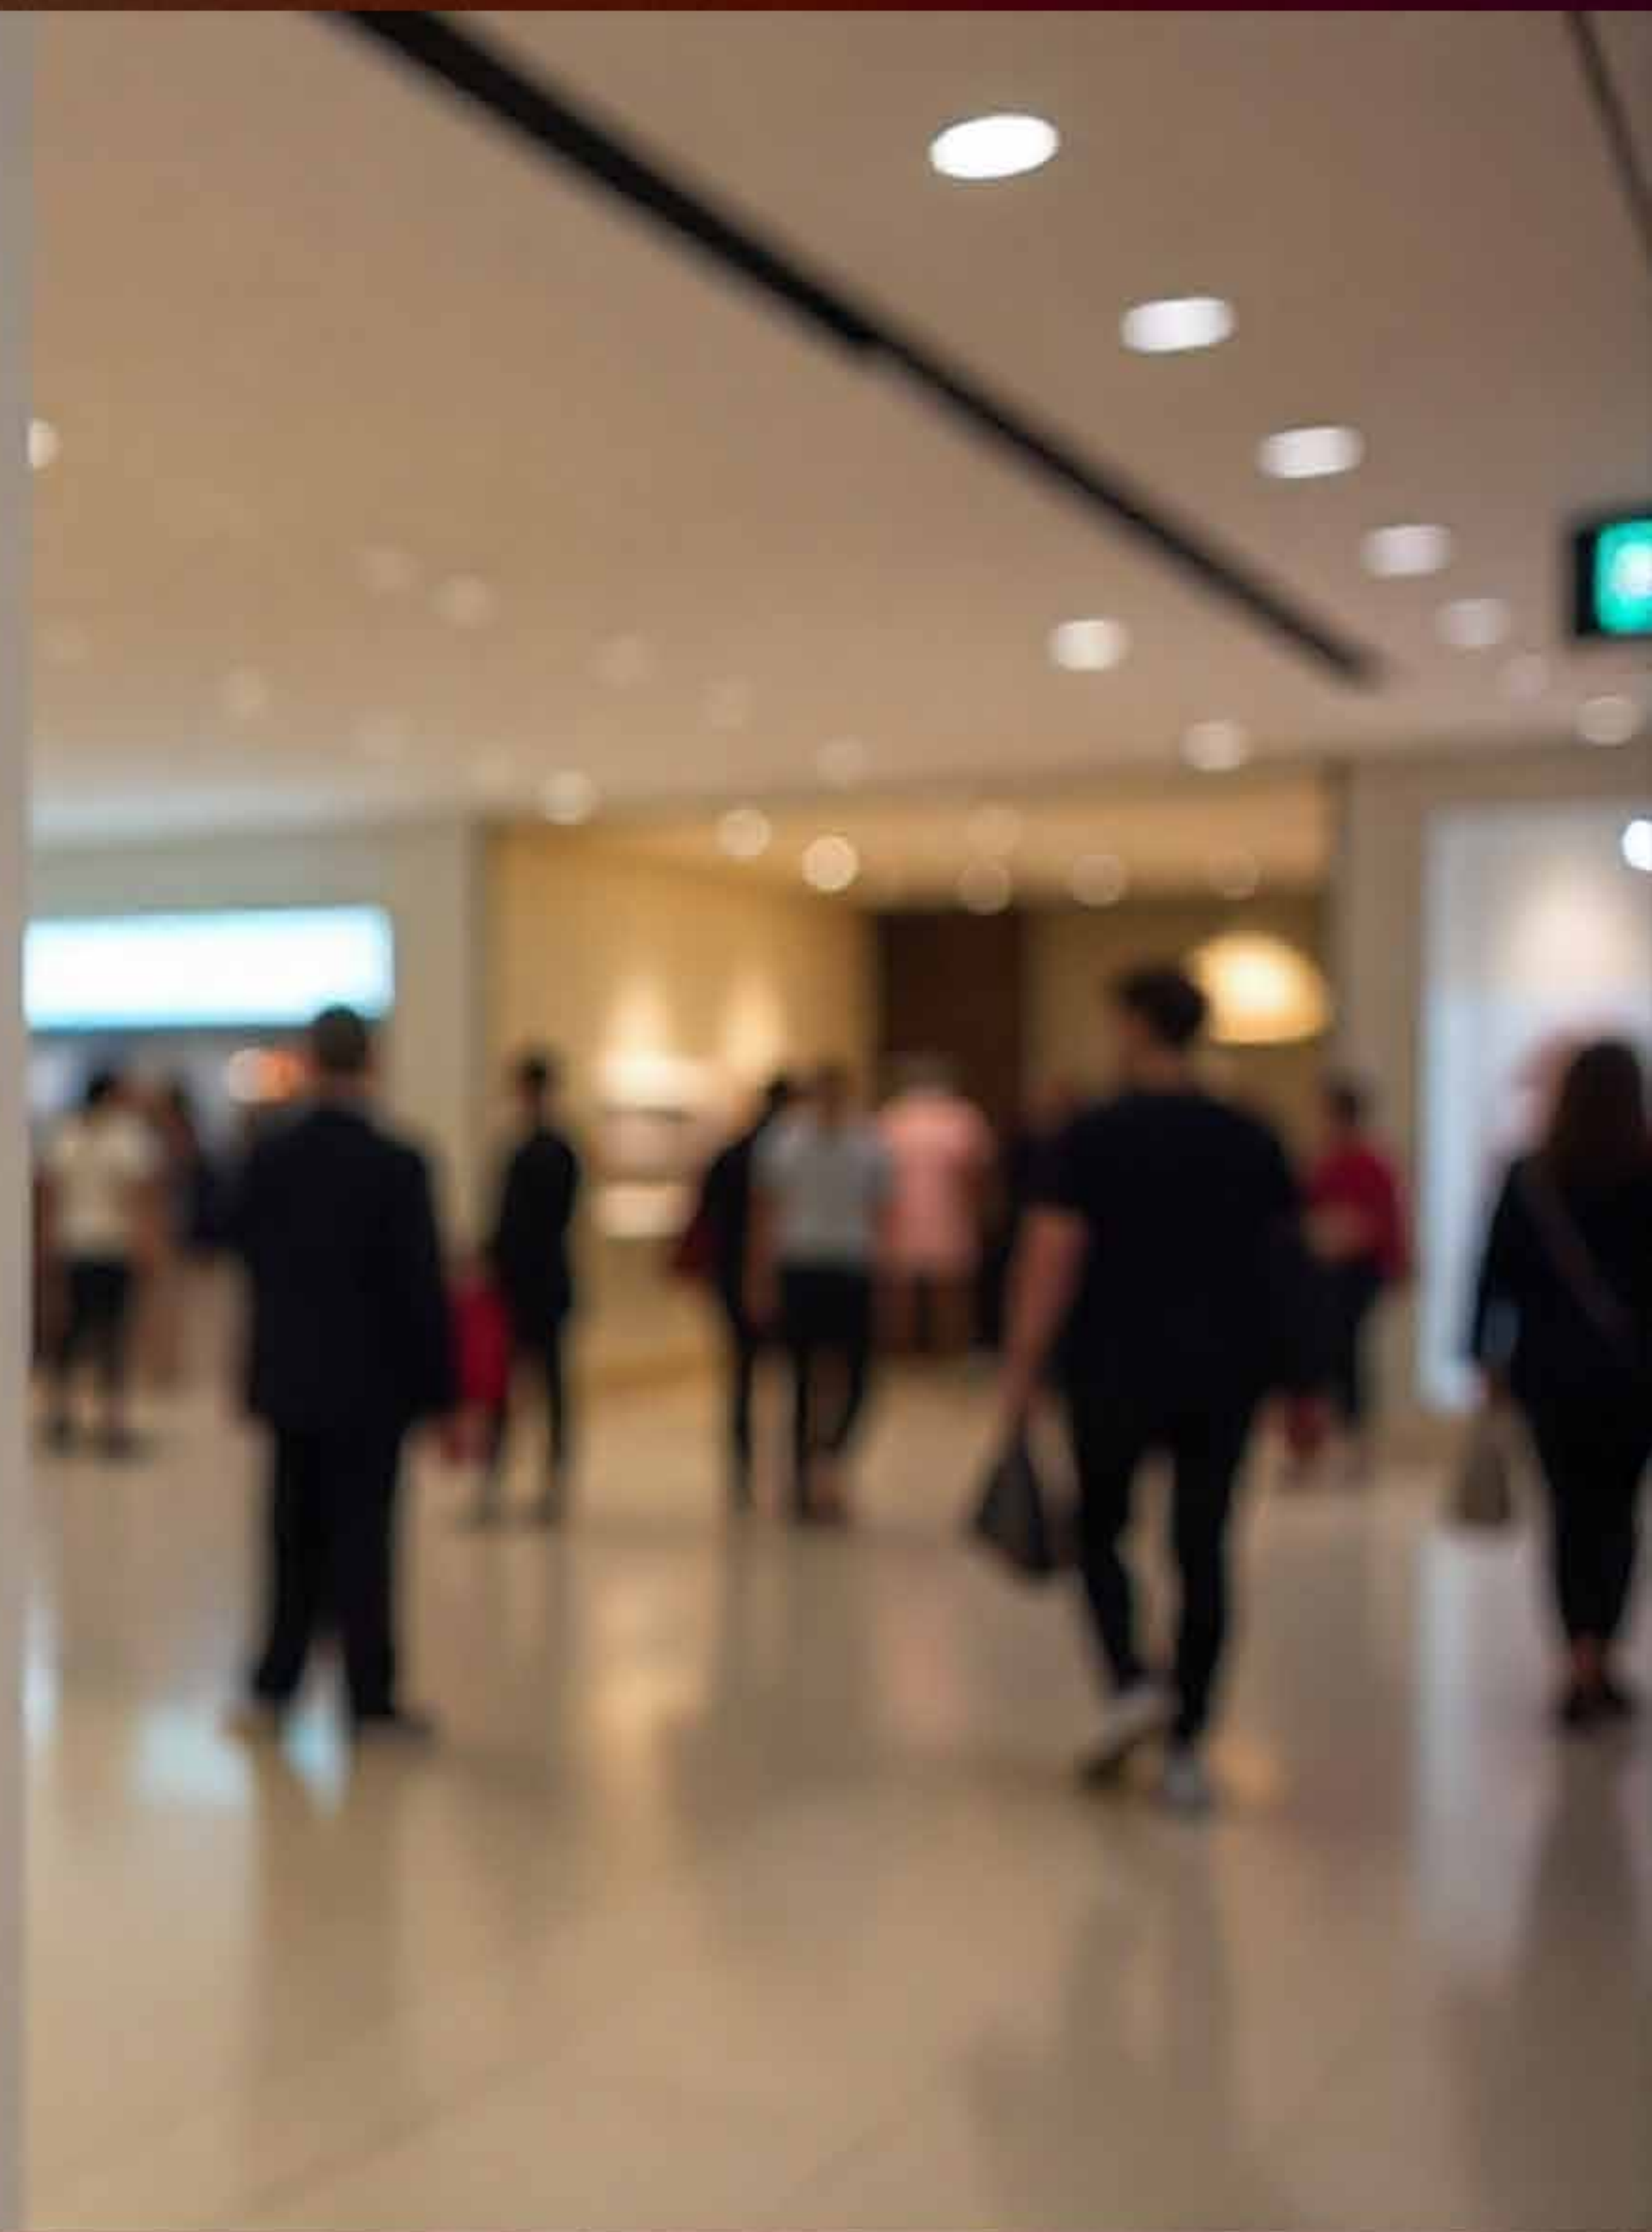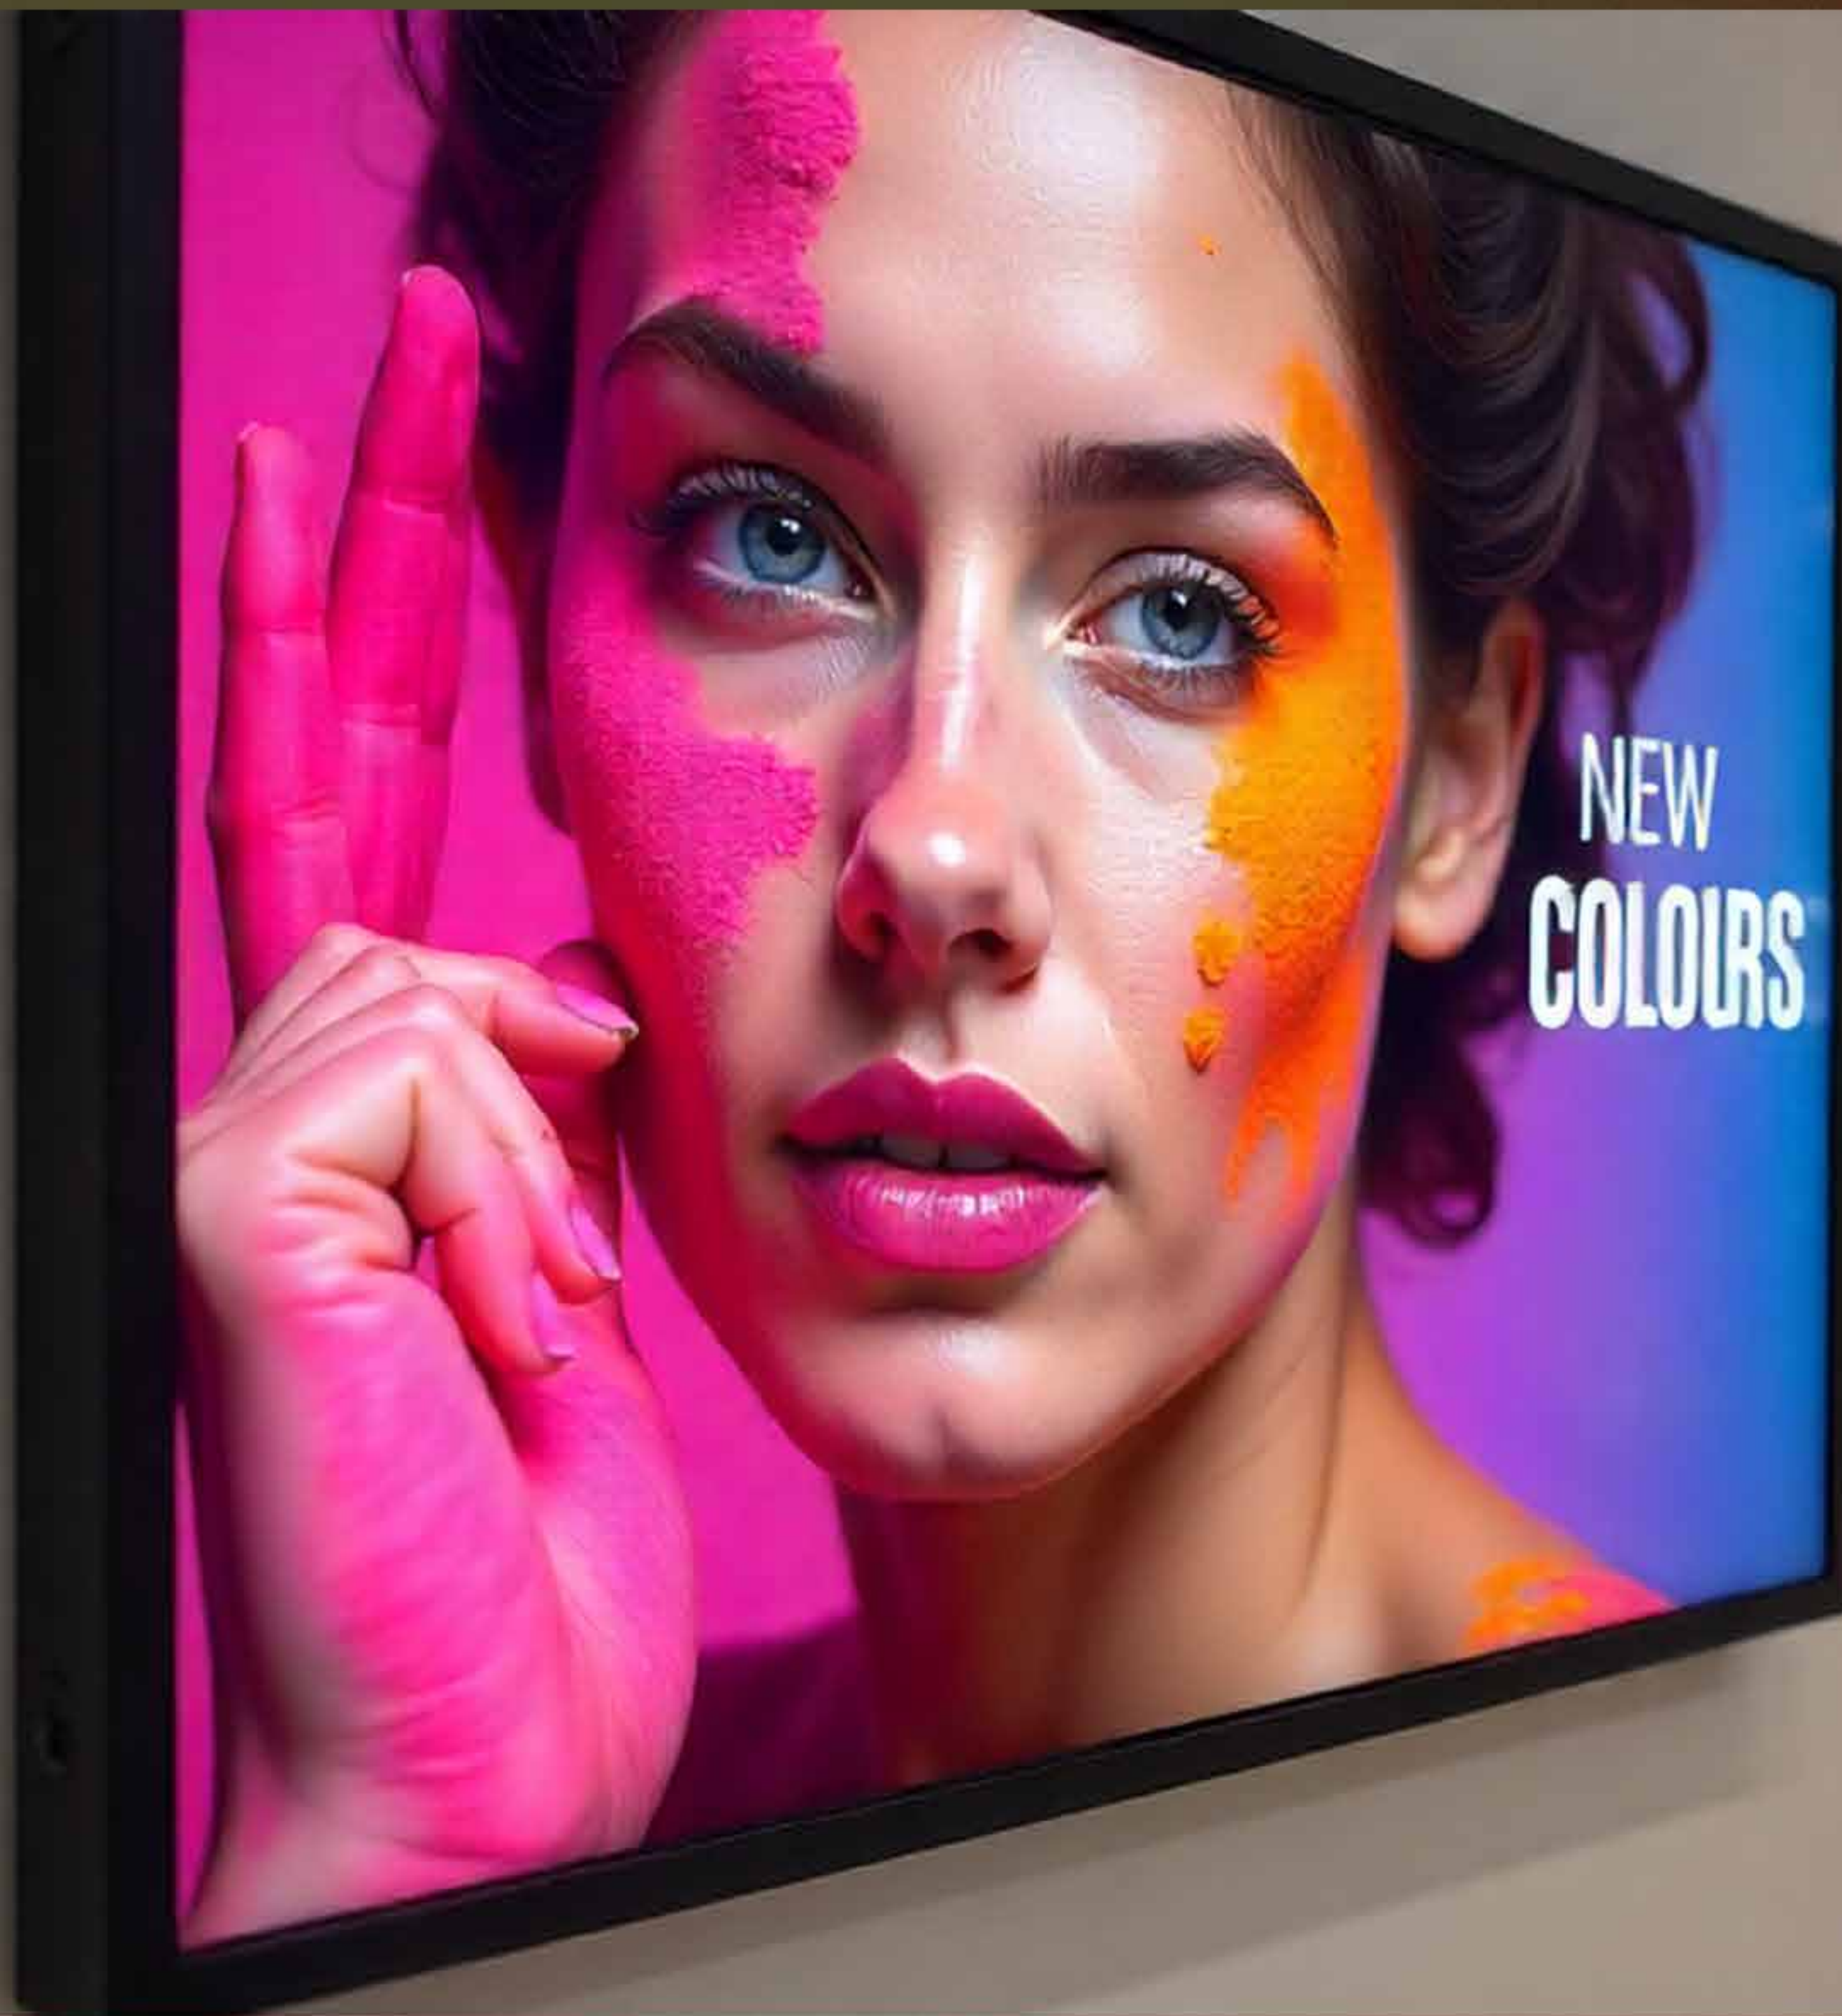

Retail



Transportation



Health Care



Education



Banks



Hospitality

TECHNICAL SPECIFICATIONS

Specification	THAZ32D	THAZ43D	THAZ49D
Panel			
Screen Size	32"	43"	49"
Contrast Ratio	1200:1	1200:1	1200:1
Aspect Ratio	16:9	16:9	16:9
Resolution	1080p (FHD)	2160p (UHD)	2160p (UHD)
Brightness	500 nits	500 nits	500 nits
Viewing Angle (H × V)	178° × 178°	178° × 178°	178° × 178°
Surface Treatment	Hard Coating (3H), Anti-glare Treatment of Front Polarizer (Haze 1% Typ.)	Hard Coating (3H), Anti-glare Treatment of Front Polarizer (Haze 1% Typ.)	Hard Coating (3H), Anti-glare Treatment of Front Polarizer (Haze 1% Typ.)
Speakers	10W × 2	10W × 2	15W × 2
Orientation	Landscape & Portrait	Landscape & Portrait	Landscape & Portrait
RAM	1GB	1GB	1GB/2GB
ROM	8/16GB	8/16GB	8/16GB
Connectivity			
Input/Output	HDMI (2), AV, LAN	HDMI (2), AV, LAN	HDMI (2), AV, LAN
Data Point	RJ45, USB (2), Wi-Fi, Bluetooth	RJ45, USB (2), Wi-Fi, Bluetooth	RJ45, USB (2), Wi-Fi, Bluetooth
Physical Specification			
Monitor Dimensions (W × H × D)	725.1 × 419.6 × 34.6 mm	963.9 × 558.9 × 59.6 mm	1116.8 × 644.2 × 59.9 mm
Environmental Conditions			
Operation Temperature	0°C to 40°C	0°C to 40°C	0°C to 40°C
Operation Humidity	10% to 80%	10% to 80%	10% to 80%
Power			
Power Supply	100–240V~, 50/60Hz	100–240V~, 50/60Hz	100–240V~, 50/60Hz
Power Type	Built-in	Built-in	Built-in
Typical Power Consumption	45W	75W	60W
Media Player Compatibility			
OS	Android 11.0	Android 11.0	Android 11.0
Screen Mirroring	Yes	Yes	Yes
Software Compatibility			
Content Management	Aaztec CMS (optional)	Aaztec CMS (optional)	Aaztec CMS (optional)
Control & Monitoring	Aaztec Link, Remote on/off, Source Change, Volume, Reports, Email Notifications	Aaztec Link, Remote on/off, Source Change, Volume, Reports, Email Notifications	Aaztec Link, Remote on/off, Source Change, Volume, Reports, Email Notifications
Accessories	Remote Control, Power Cord, User Guide	Remote Control, Power Cord, User Guide	Remote Control, Power Cord, User Guide
Certification	BIS / RoHS / CE / FCC	BIS / RoHS / CE / FCC	BIS / RoHS / CE / FCC


*Due to continuous development, Specifications may change without any prior intimation.



LFD

Ultra Slim Design Modern Display

Available Size : 32 43 49 55 65 75 86 110
(In inches)

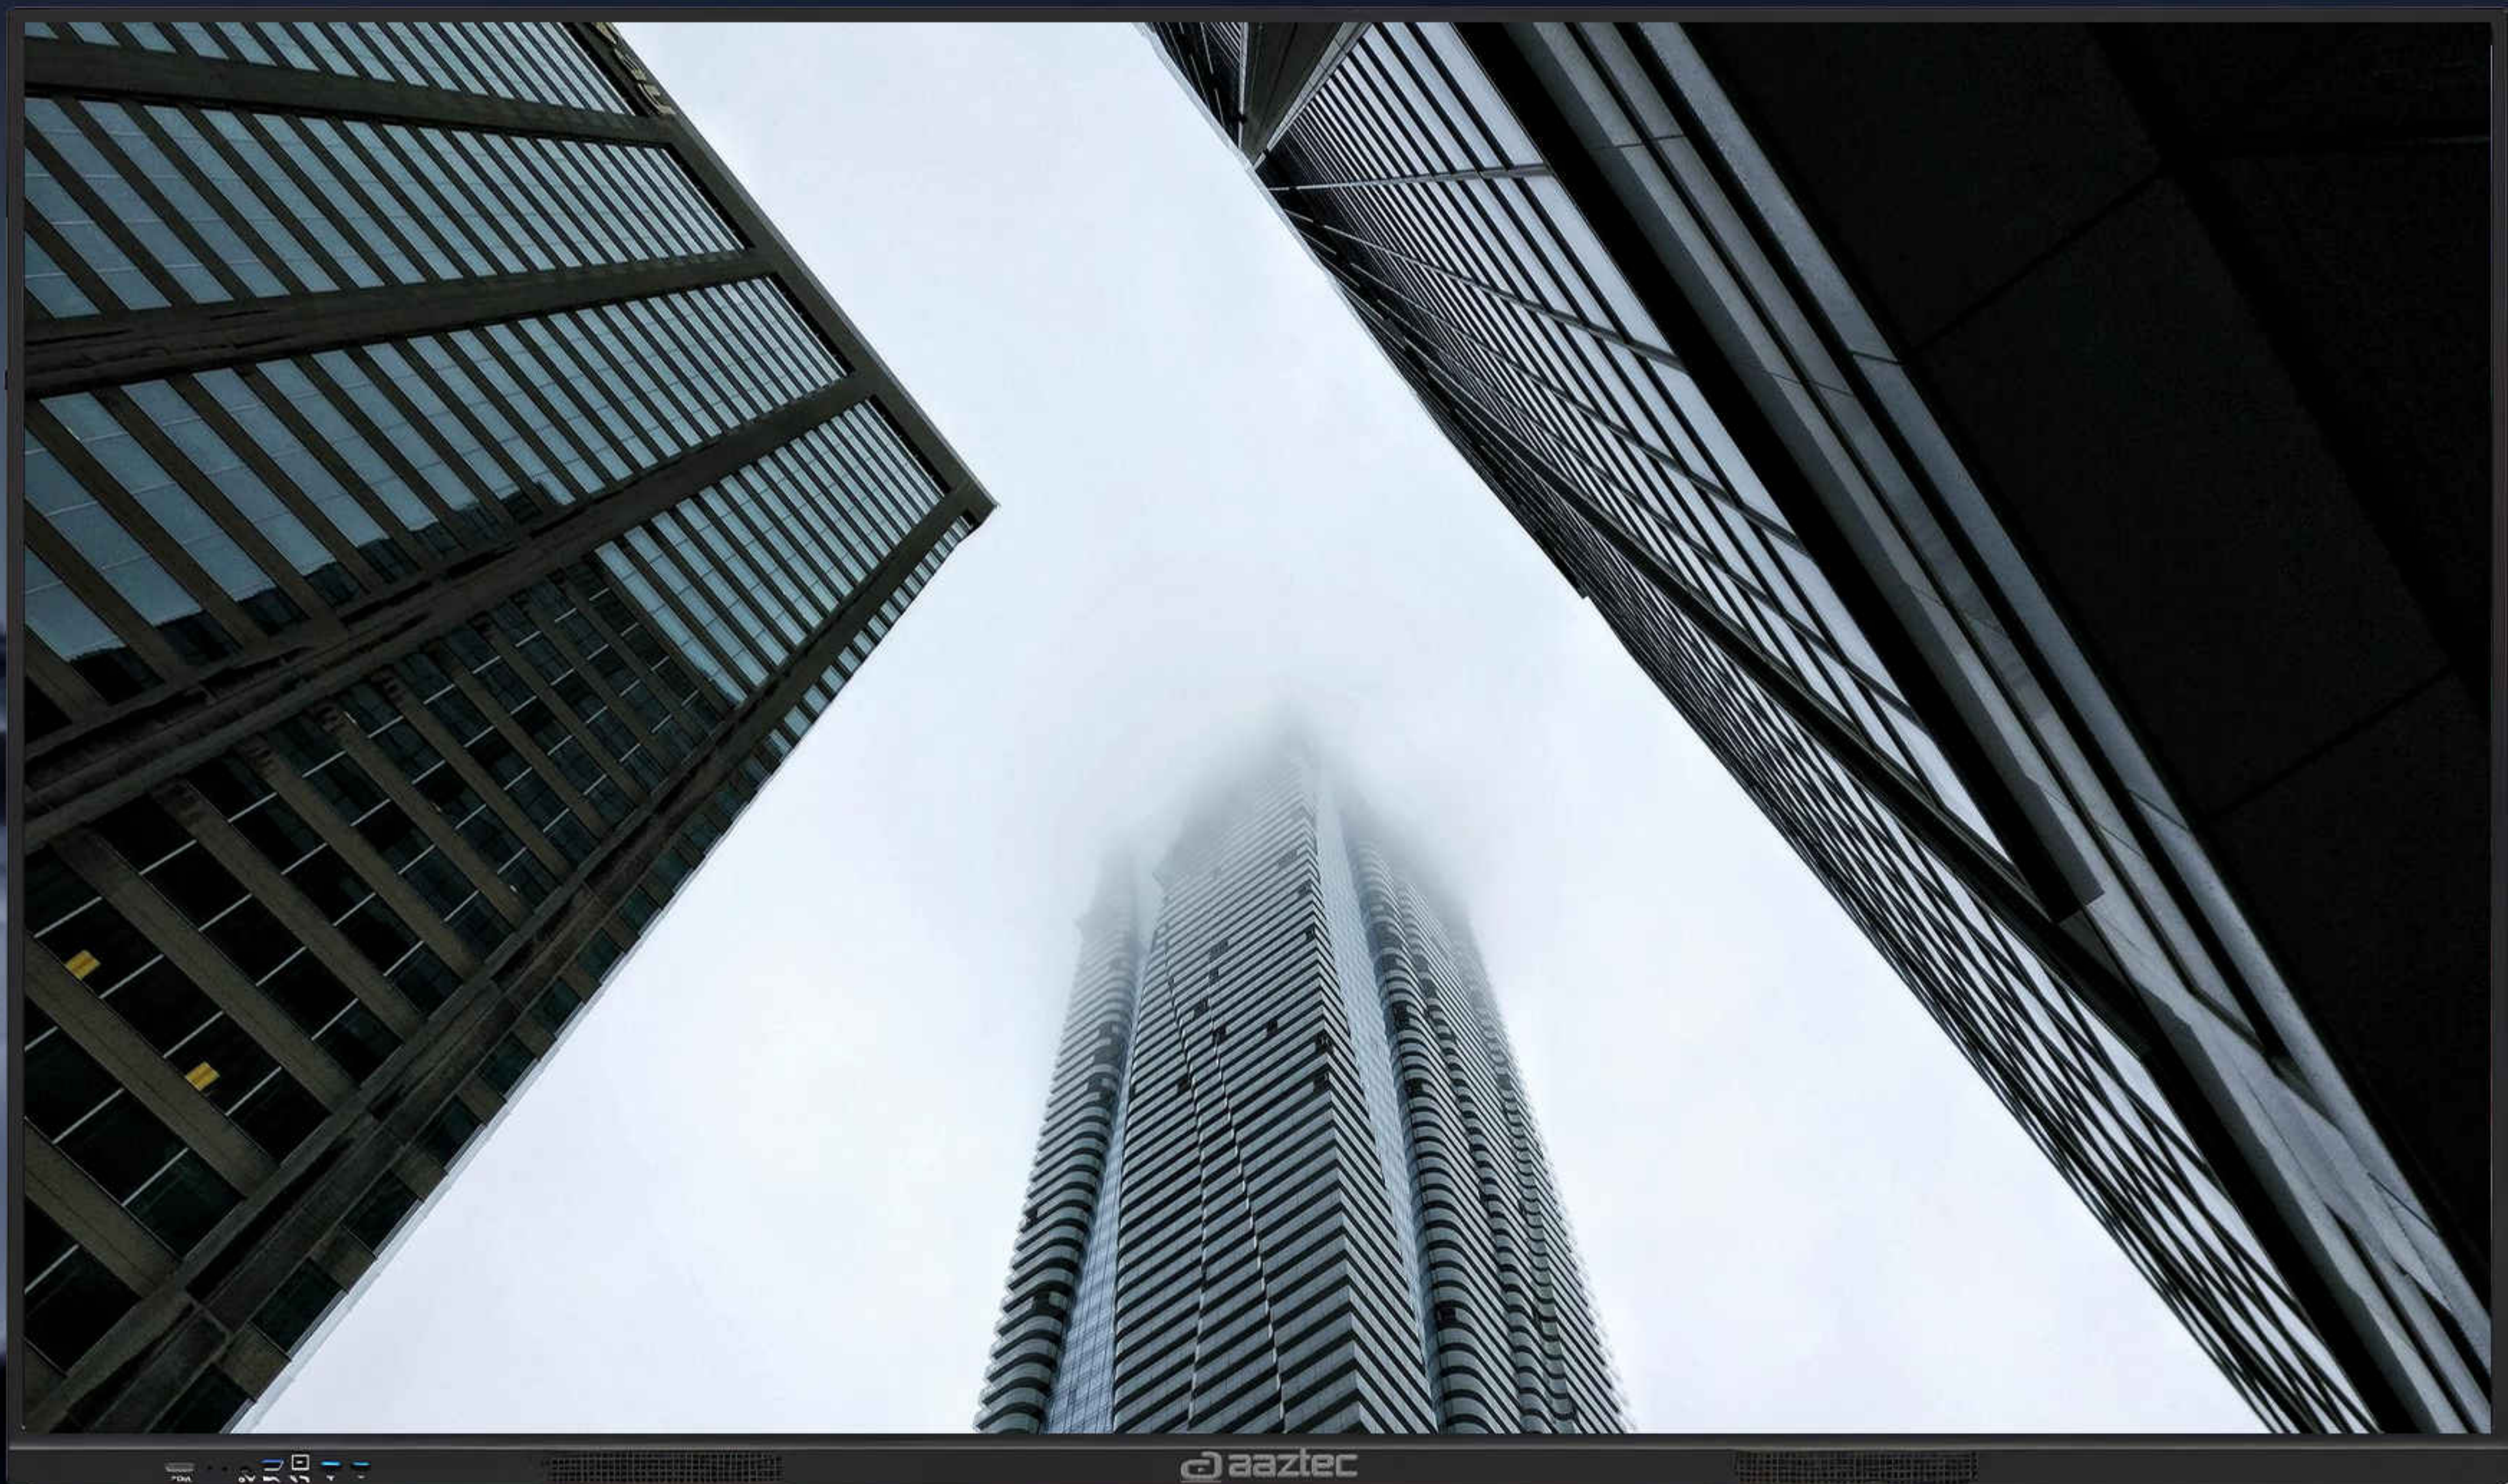

Ultra High
Definition:
4K & Beyond



Landscape/
Portrait Mode



Stable &
Reliable 24x7
Display



In-Build
Media Players





High Brightness
315-1500 NITS



Smart
Platform


APPLICATION

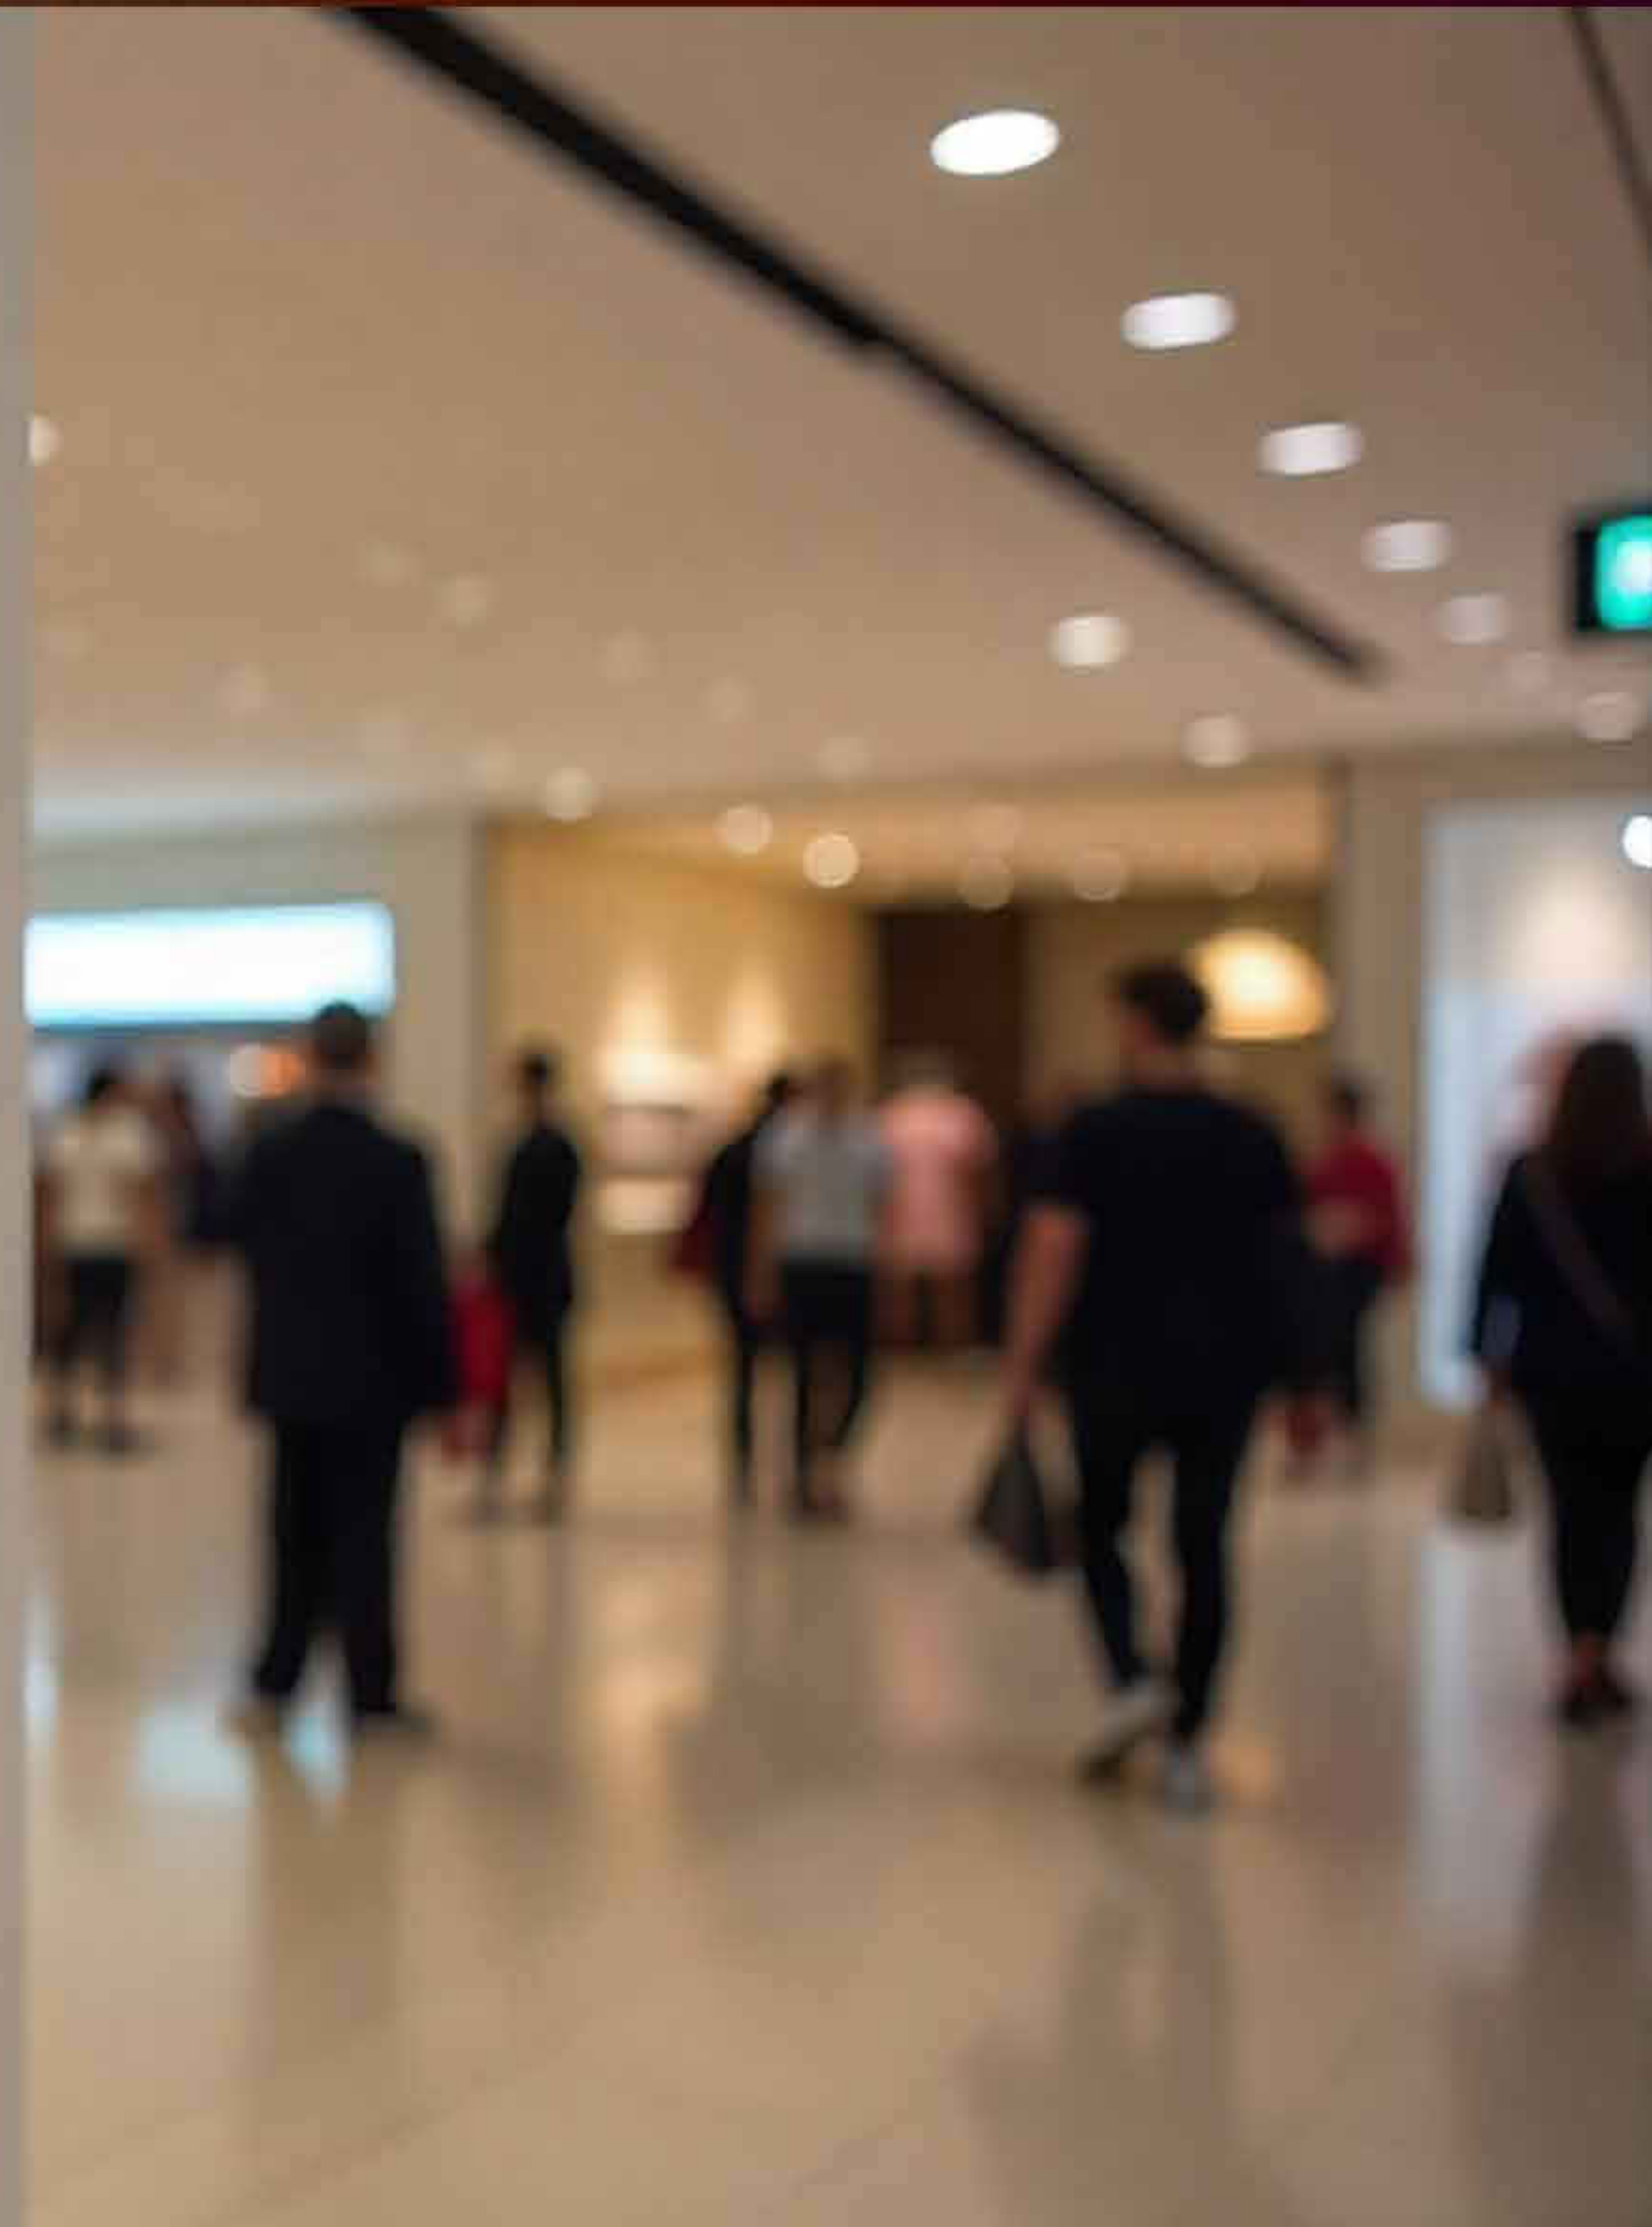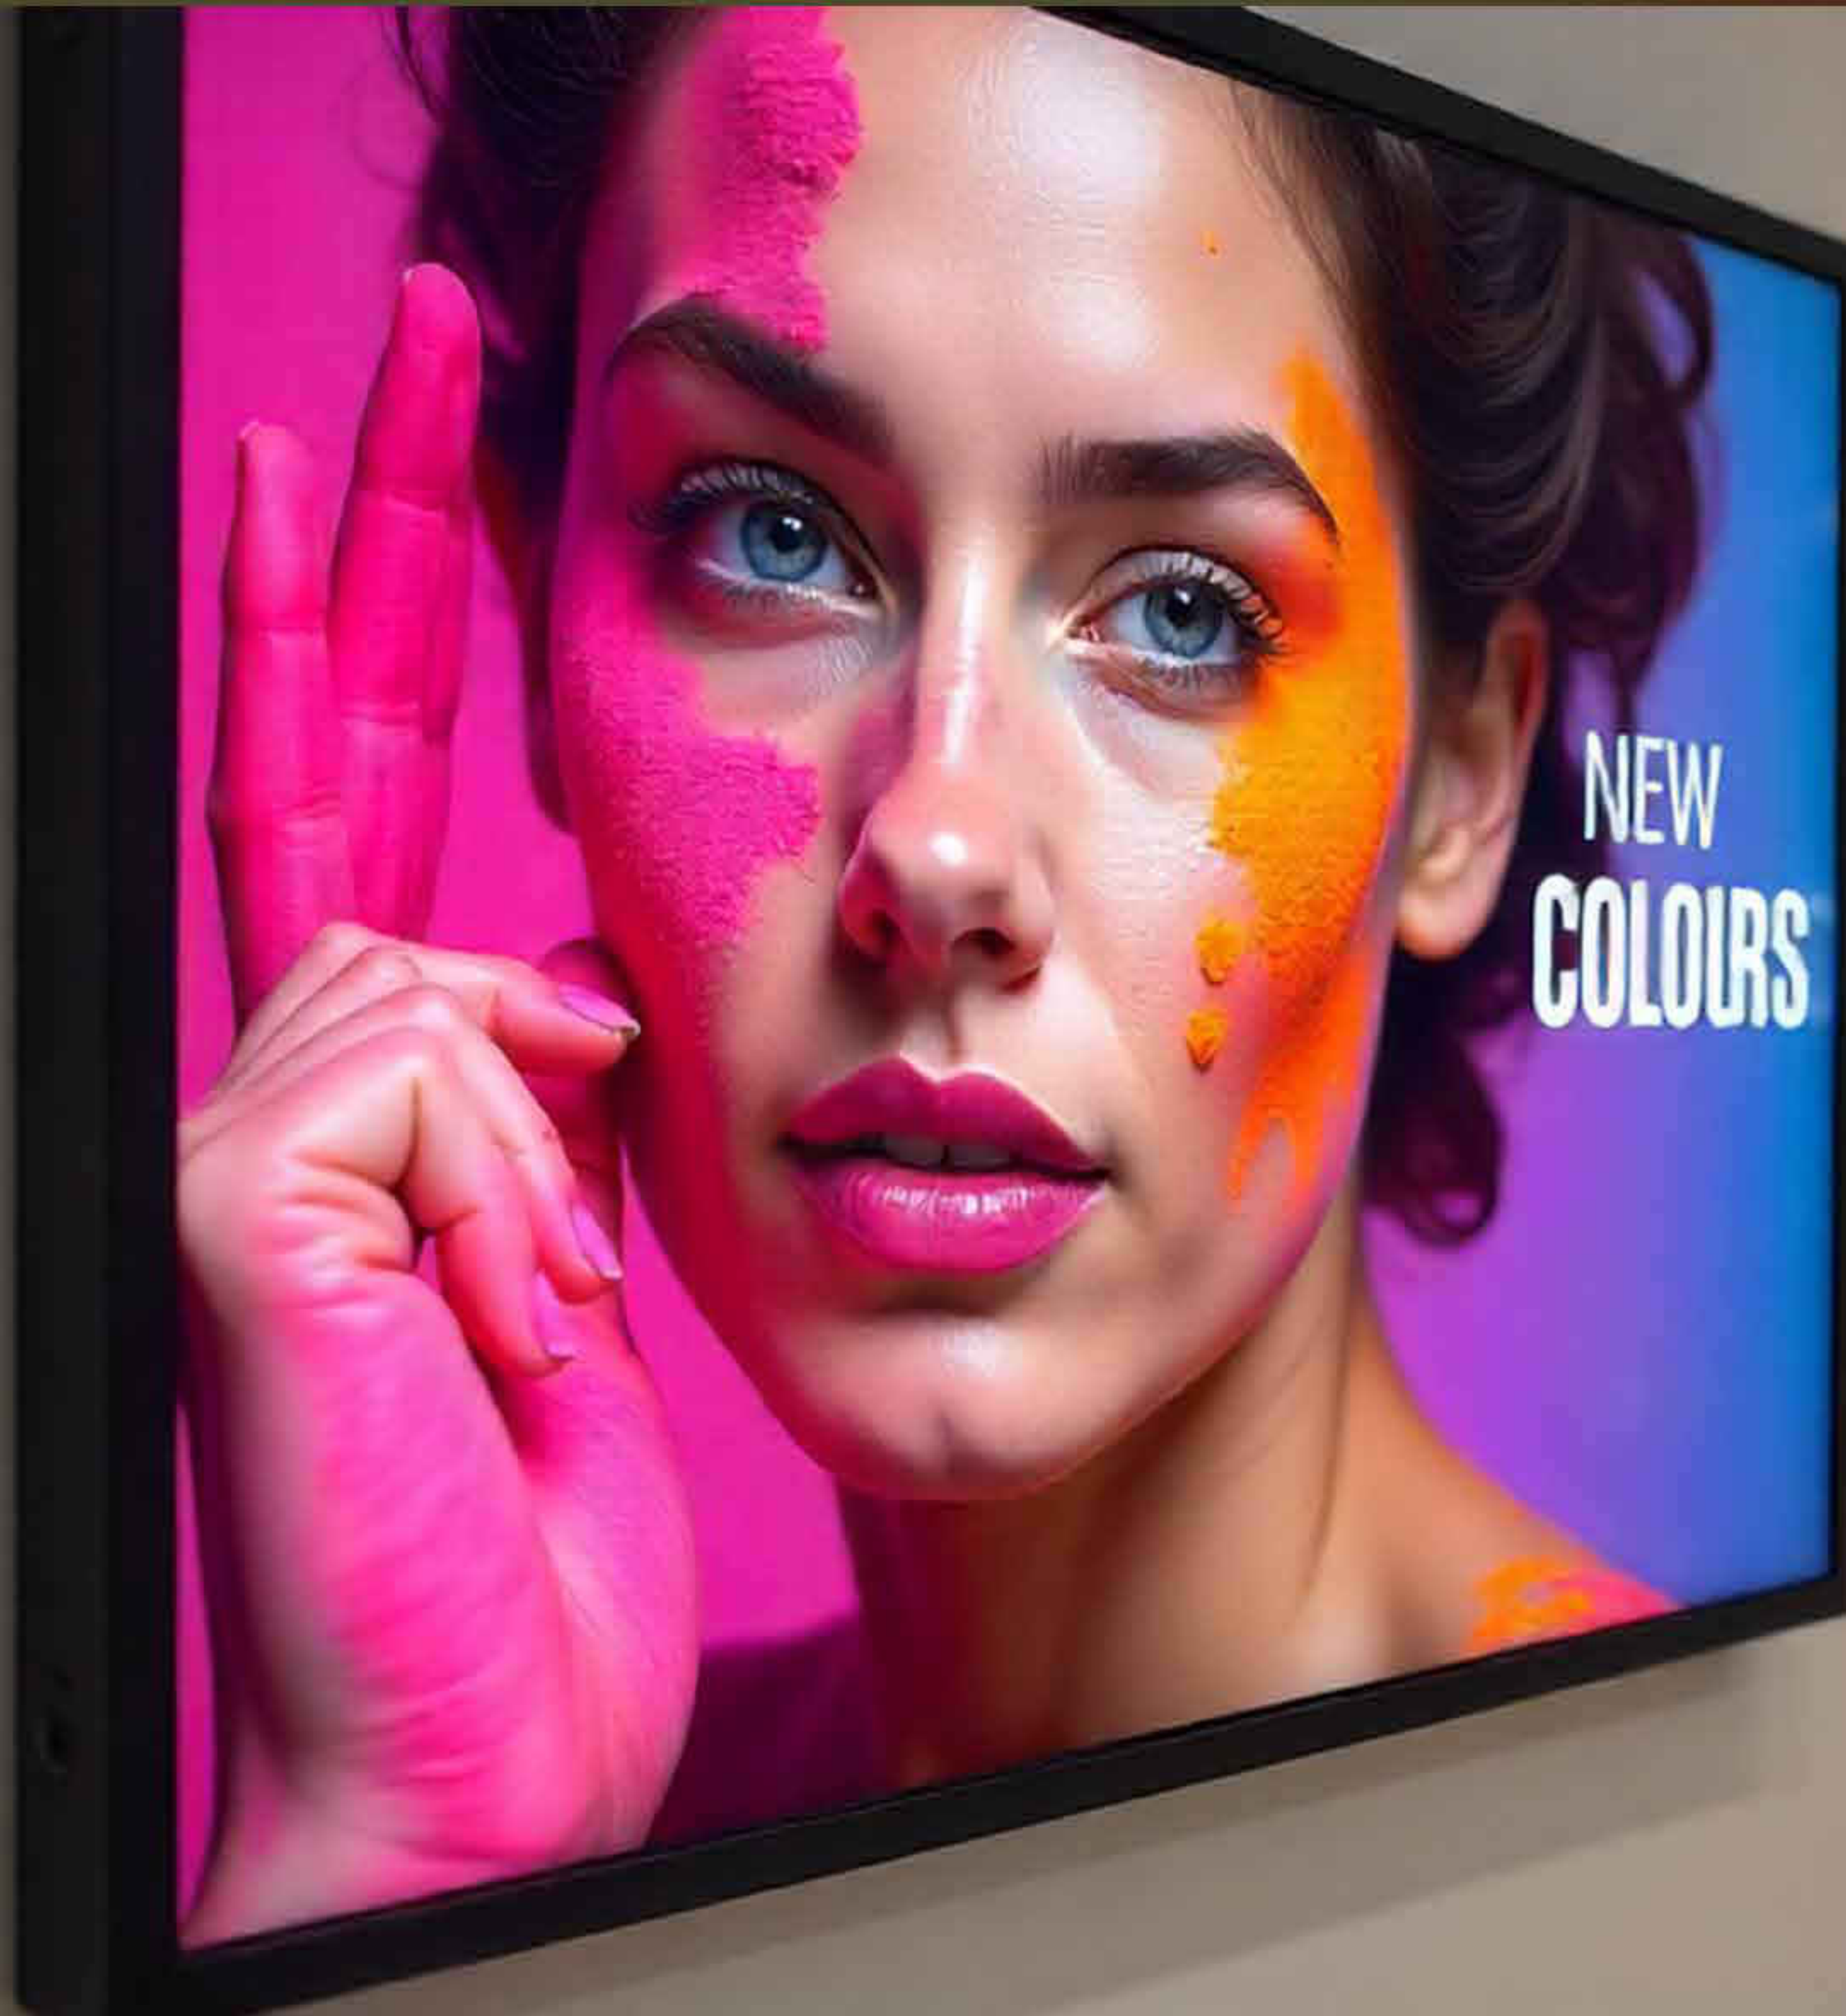

Retail




Transportation

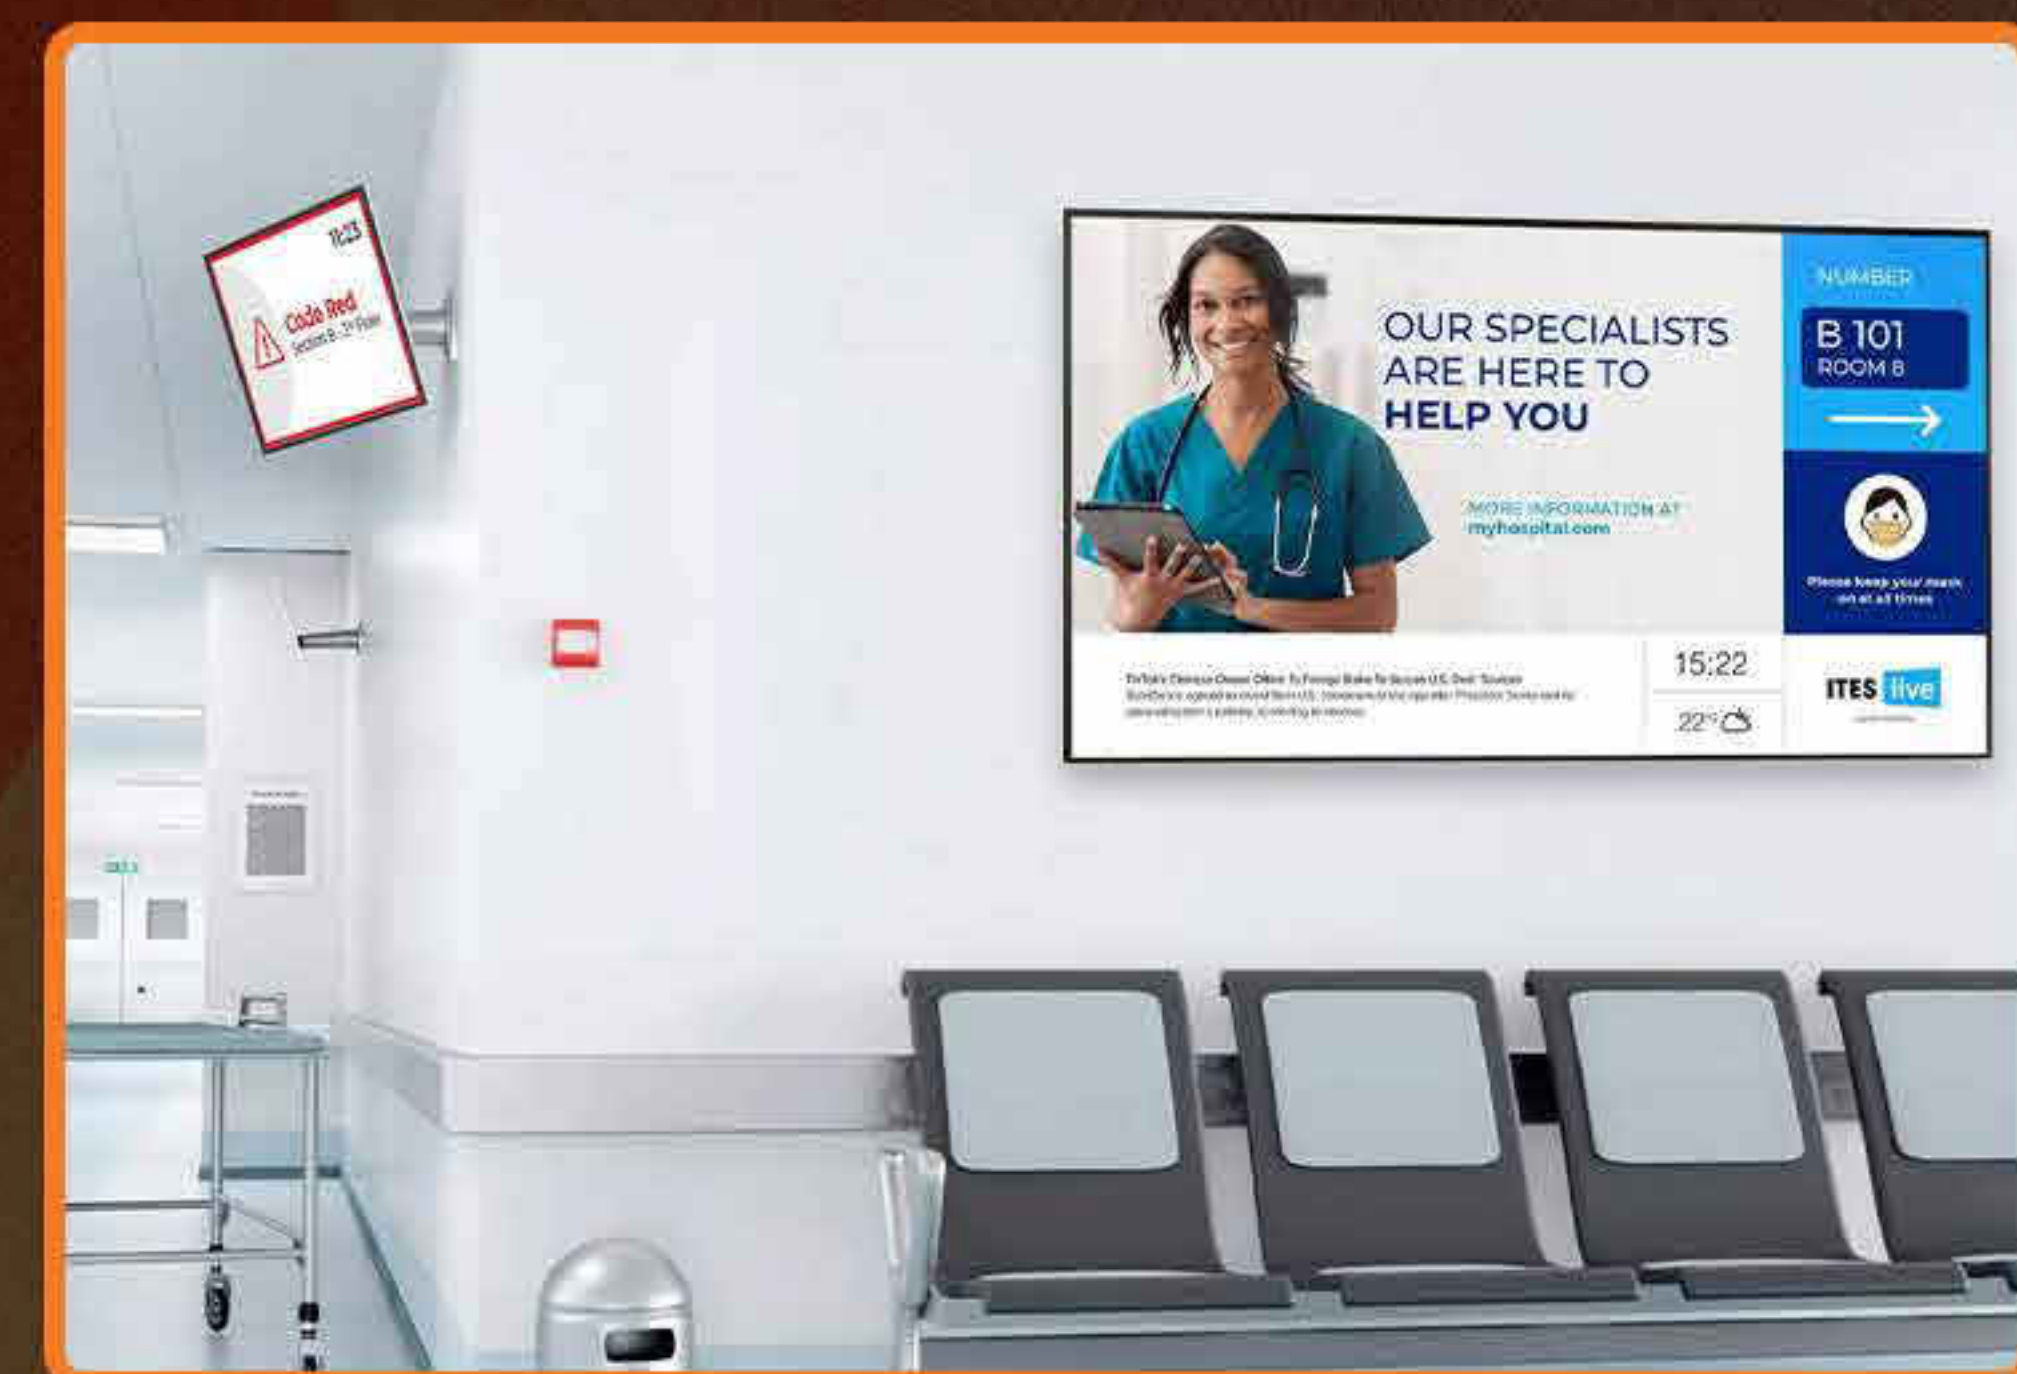

Health Care



Education

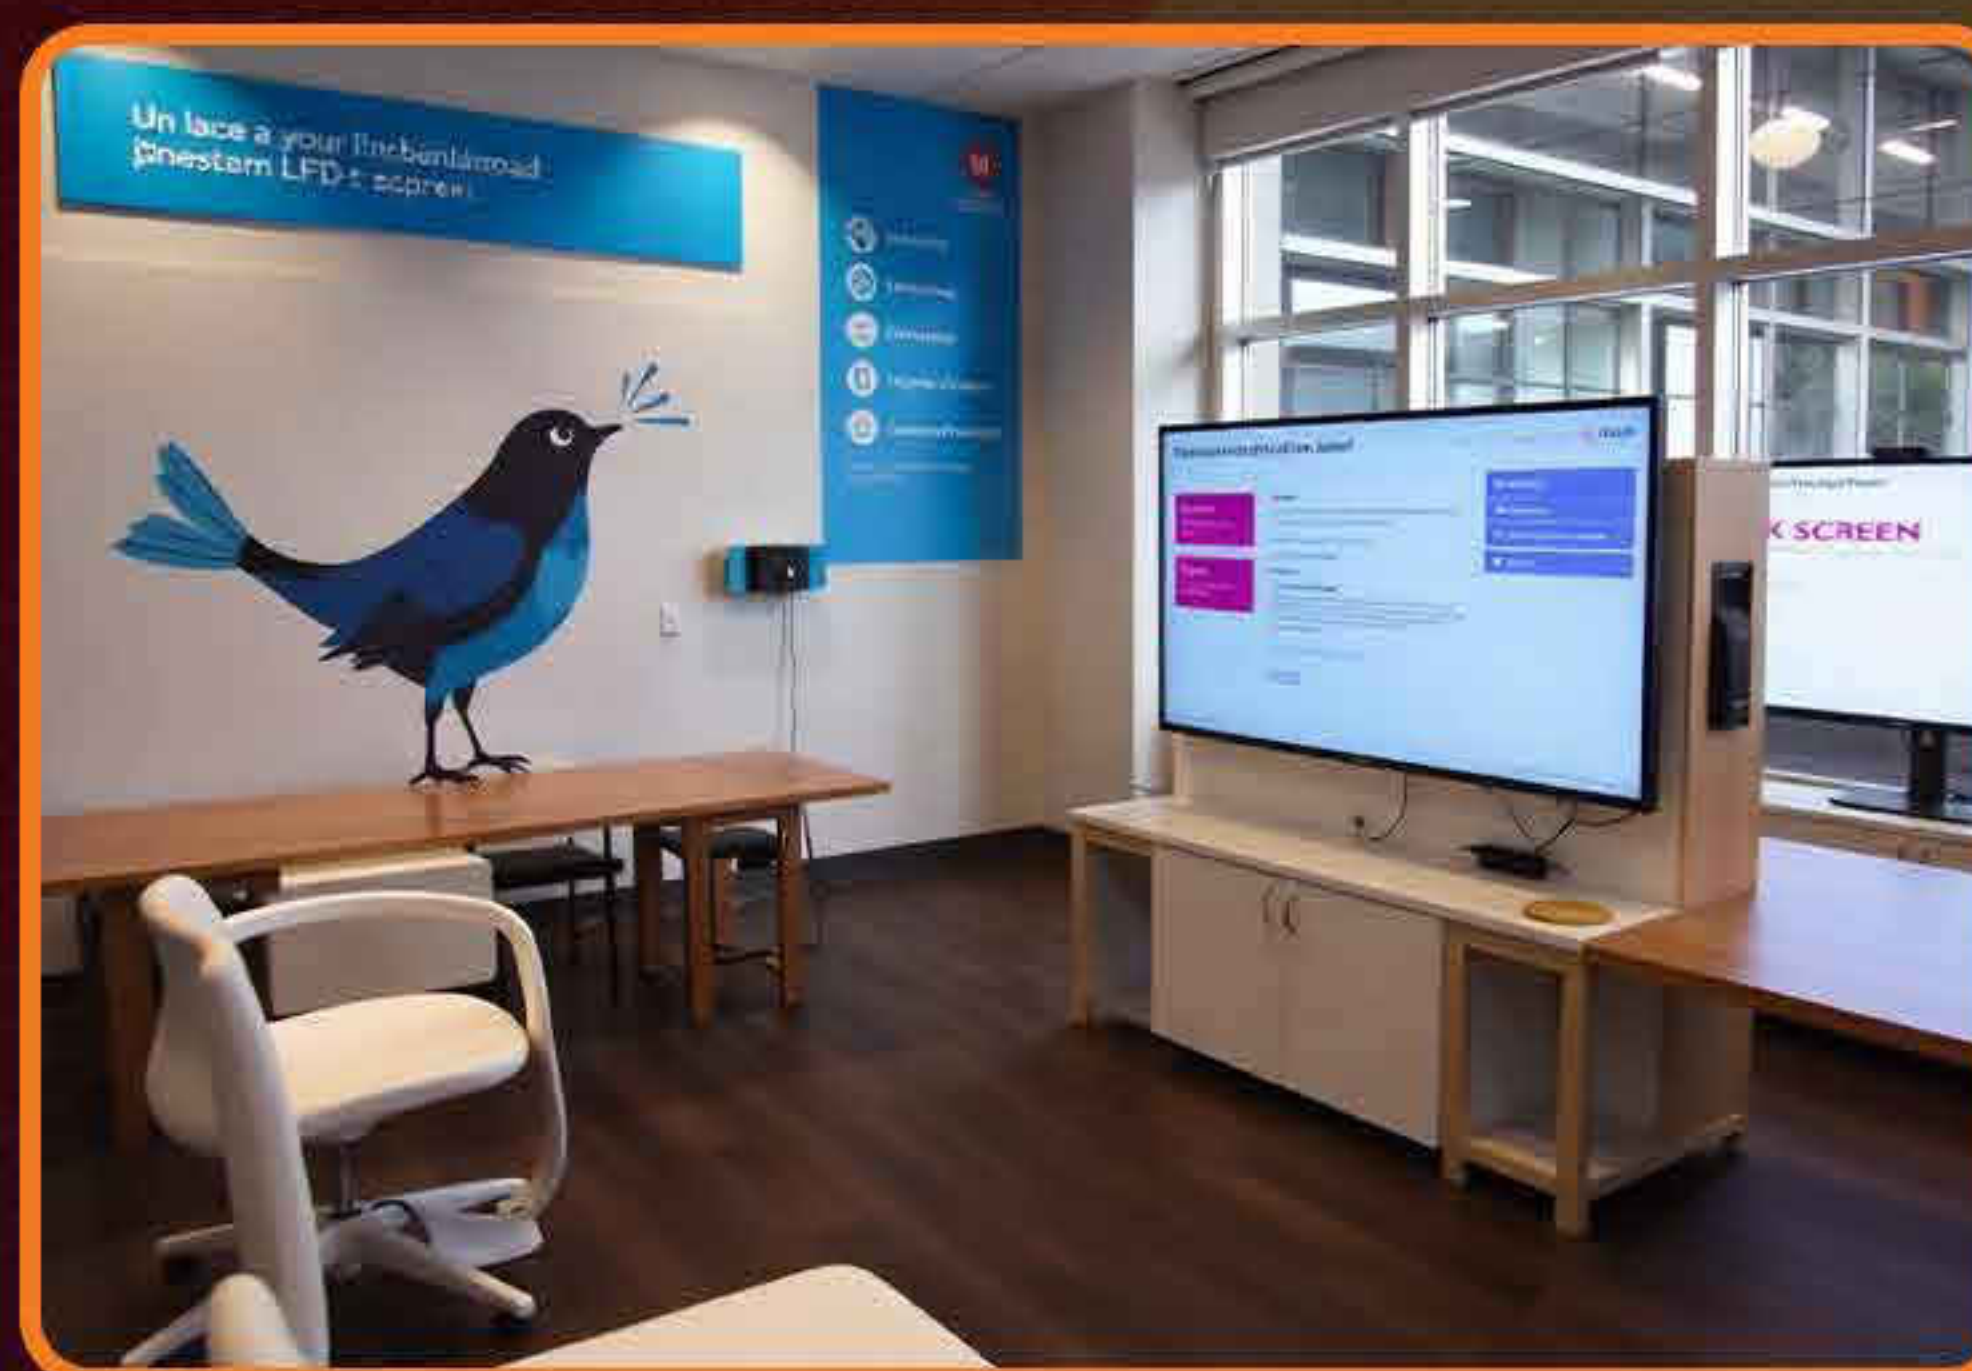

Banks



Hospitality

TECHNICAL SPECIFICATIONS

Specification	THAZ55D	THAZ65D	THAZ75D
Panel			
Screen Size	55"	65"	75"
Contrast Ratio	1200:1	1200:1	1200:1
Aspect Ratio	16:9	16:9	16:9
Native Resolution	2160p (UHD)	2160p (UHD)	2160p (UHD)
Brightness	400 nits	400 nits	400 nits
Viewing Angle (H × V)	178° × 178°	178° × 178°	178° × 178°
Surface Treatment	Hard Coating (3H), Anti-glare Treatment of Front Polarizer (Haze 1% Typ.)	Hard Coating (3H), Anti-glare Treatment of Front Polarizer (Haze 1% Typ.)	Hard Coating (3H), Anti-glare Treatment of Front Polarizer (Haze 1% Typ.)
Speakers	12W × 2	12W × 2	12W × 2
Orientation	Landscape/Portrait	Landscape/Portrait	Landscape/Portrait
Connectivity			
Input/Output	HDMI (3), RF, Composite	HDMI (3), RF, Composite	HDMI (3), RF, Composite
Data Point	RJ45, USB, Wi-Fi, Bluetooth	RJ45, USB, Wi-Fi, Bluetooth	RJ45, USB, Wi-Fi, Bluetooth
Physical Specification			
Monitor Dimensions (W × H × D)	1230.5 × 707.2 × 59.9 mm	1452 × 834.3 × 71.9 mm	1678.9 × 962.8 × 59.9 mm
Environmental Conditions			
Operation Temperature	0°C to 40°C	0°C to 40°C	0°C to 40°C
Operation Humidity	10% to 80%	10% to 80%	10% to 80%
Power			
Power Supply	100–240V~, 50/60Hz	100–240V~, 50/60Hz	100–240V~, 50/60Hz
Power Type	Built-in	Built-in	Built-in
Typical Power Consumption	100W	150W	180W
Media Player Compatibility			
OS	Android 11.0	Android 11.0	Android 11.0
Screen Mirroring	Yes	Yes	Yes
Software Compatibility			
Content Management	Aaztec CMS (optional)	Aaztec CMS (optional)	Aaztec CMS (optional)
Control & Monitoring	Aaztec Link, Remote on/off, Source Change, Volume, Reports, Email Notifications	Aaztec Link, Remote on/off, Source Change, Volume, Reports, Email Notifications	Aaztec Link, Remote on/off, Source Change, Volume, Reports, Email Notifications
Accessories	Remote Control, Power Cord, User Guide	Remote Control, Power Cord, User Guide	Remote Control, Power Cord, User Guide
Certification	BIS / RoHS / CE / FCC	BIS / RoHS / CE / FCC	BIS / RoHS / CE / FCC

**Due to continuous development, Specifications may change without any prior intimation.*



LFD

Available Size : **86** **98** **110**
(In inches)



**Ultra High
Definition:
Upto 4K**



**Landscape &
Portrait Mode**



**Stable &
Reliable
24x7 Display**



**In-Build
Media Players**





**High Brightness
350-500 NITS**



**Smart
Platform**


APPLICATION

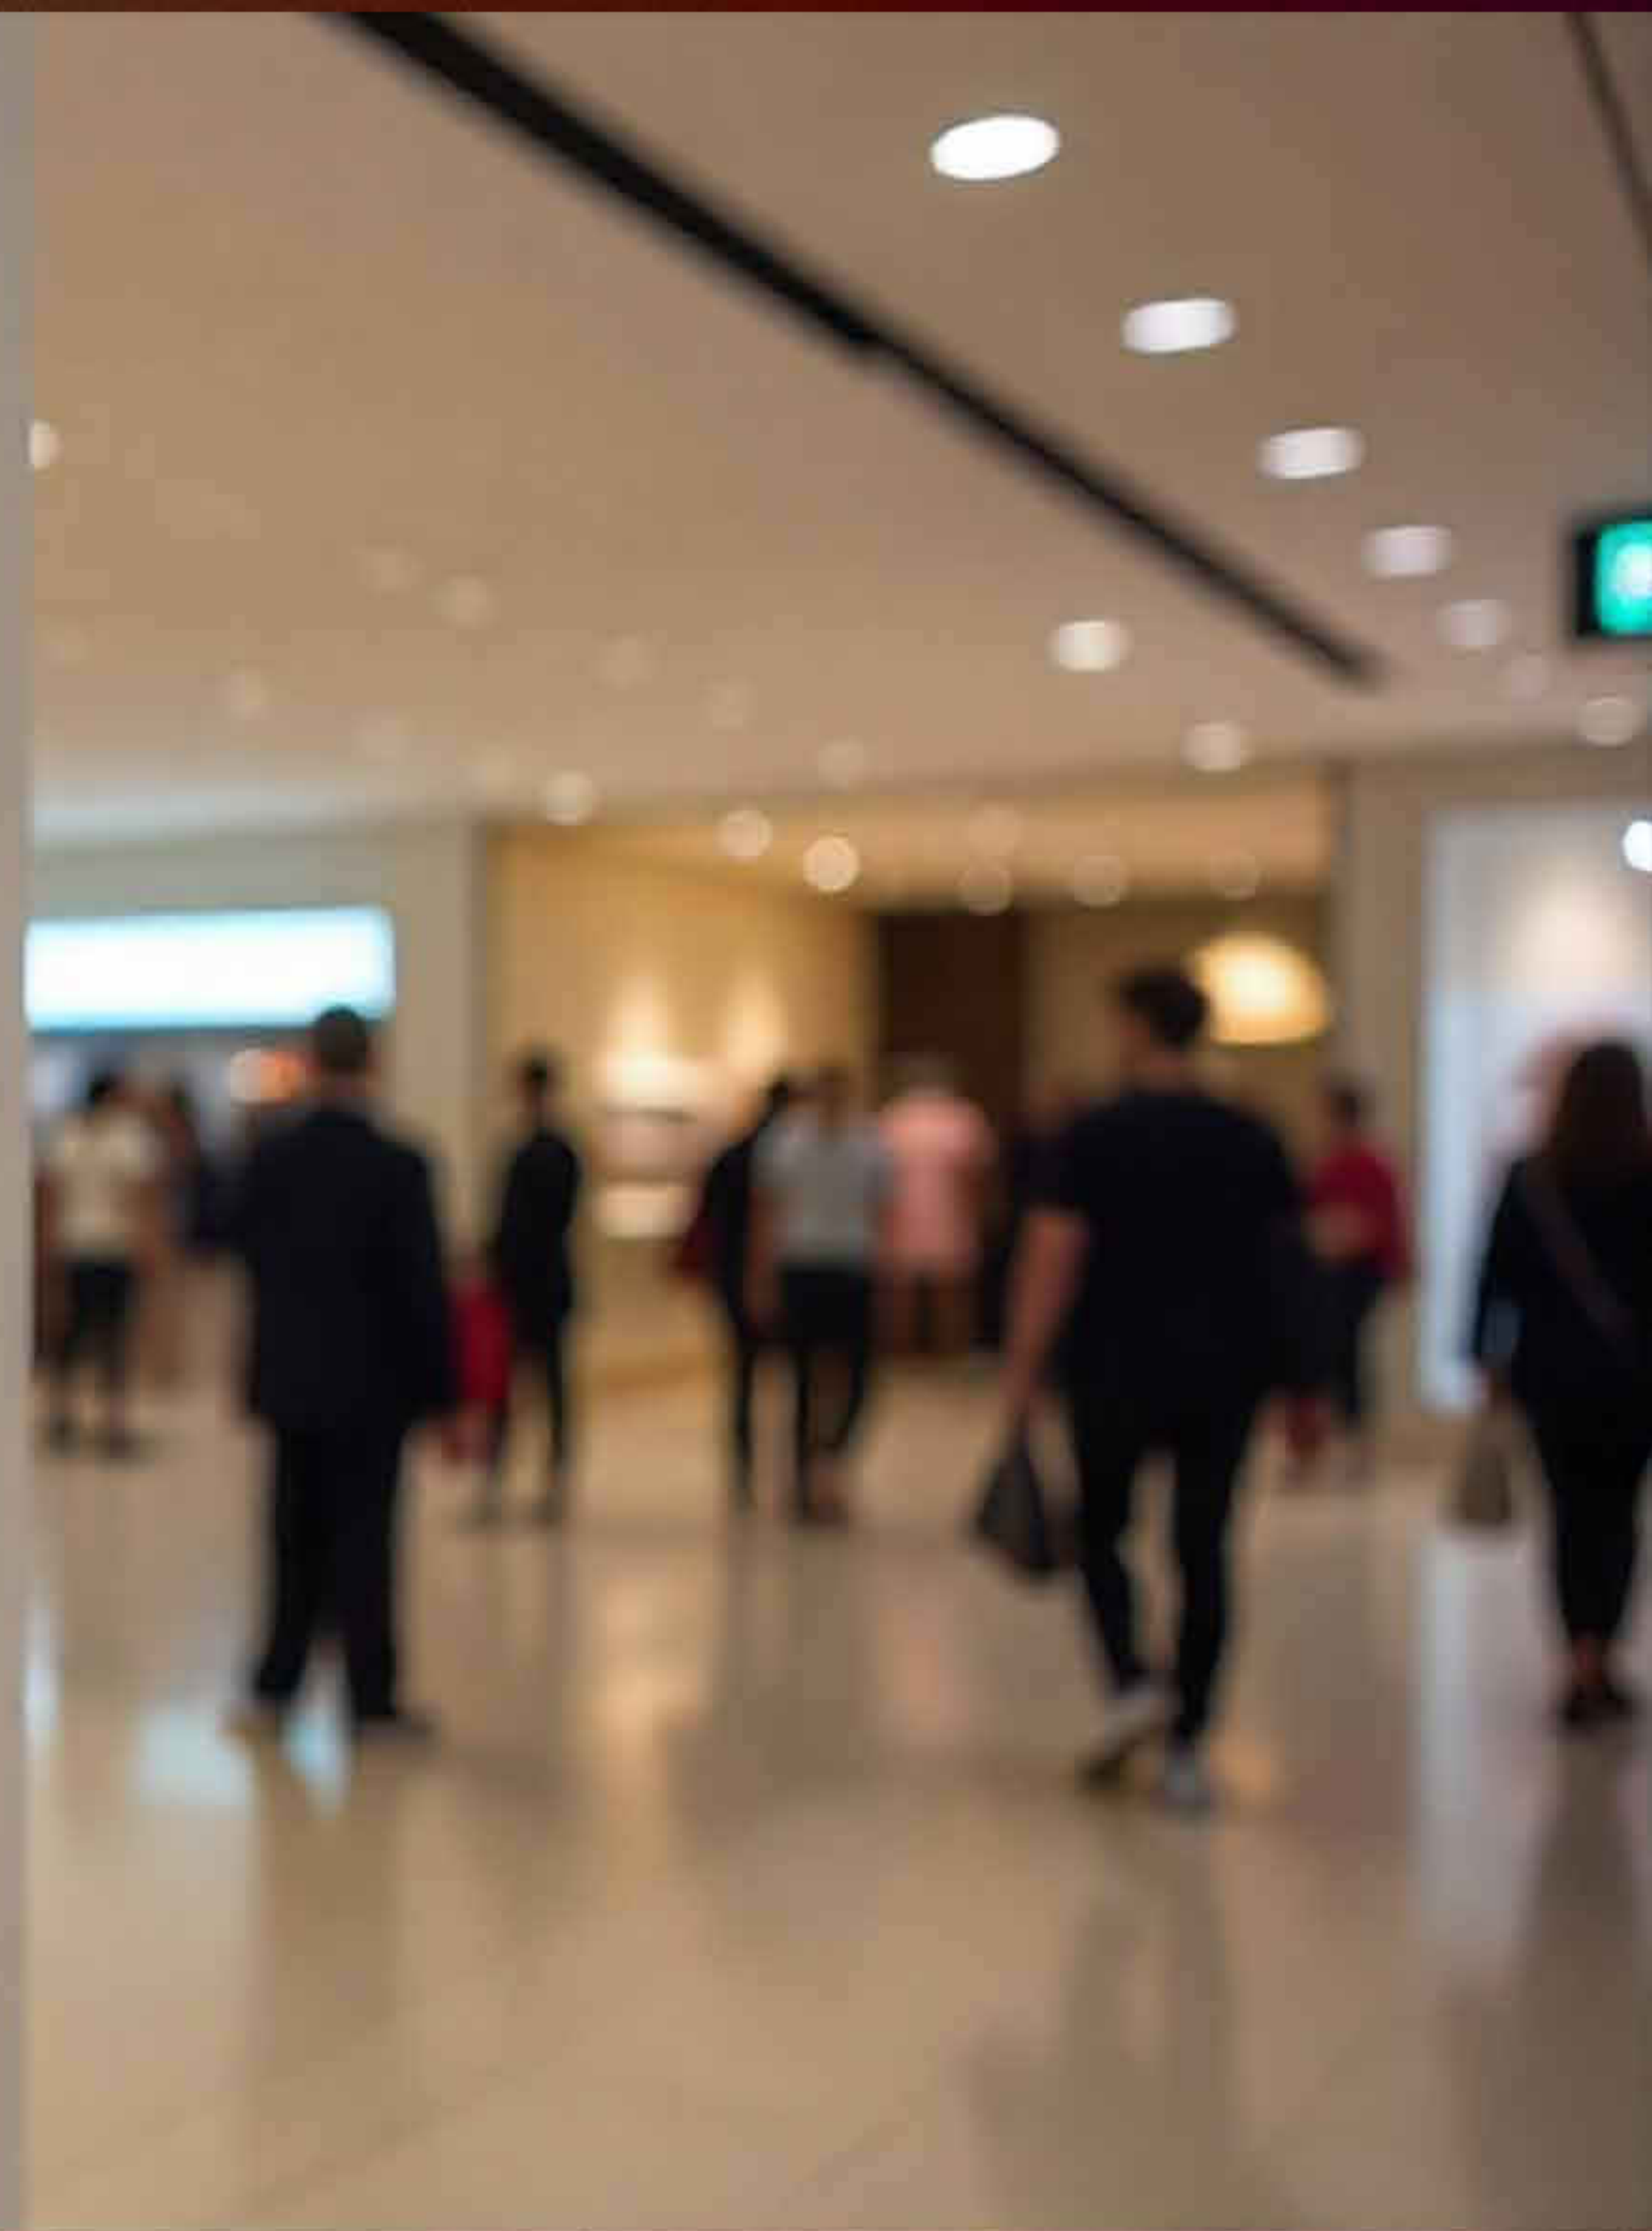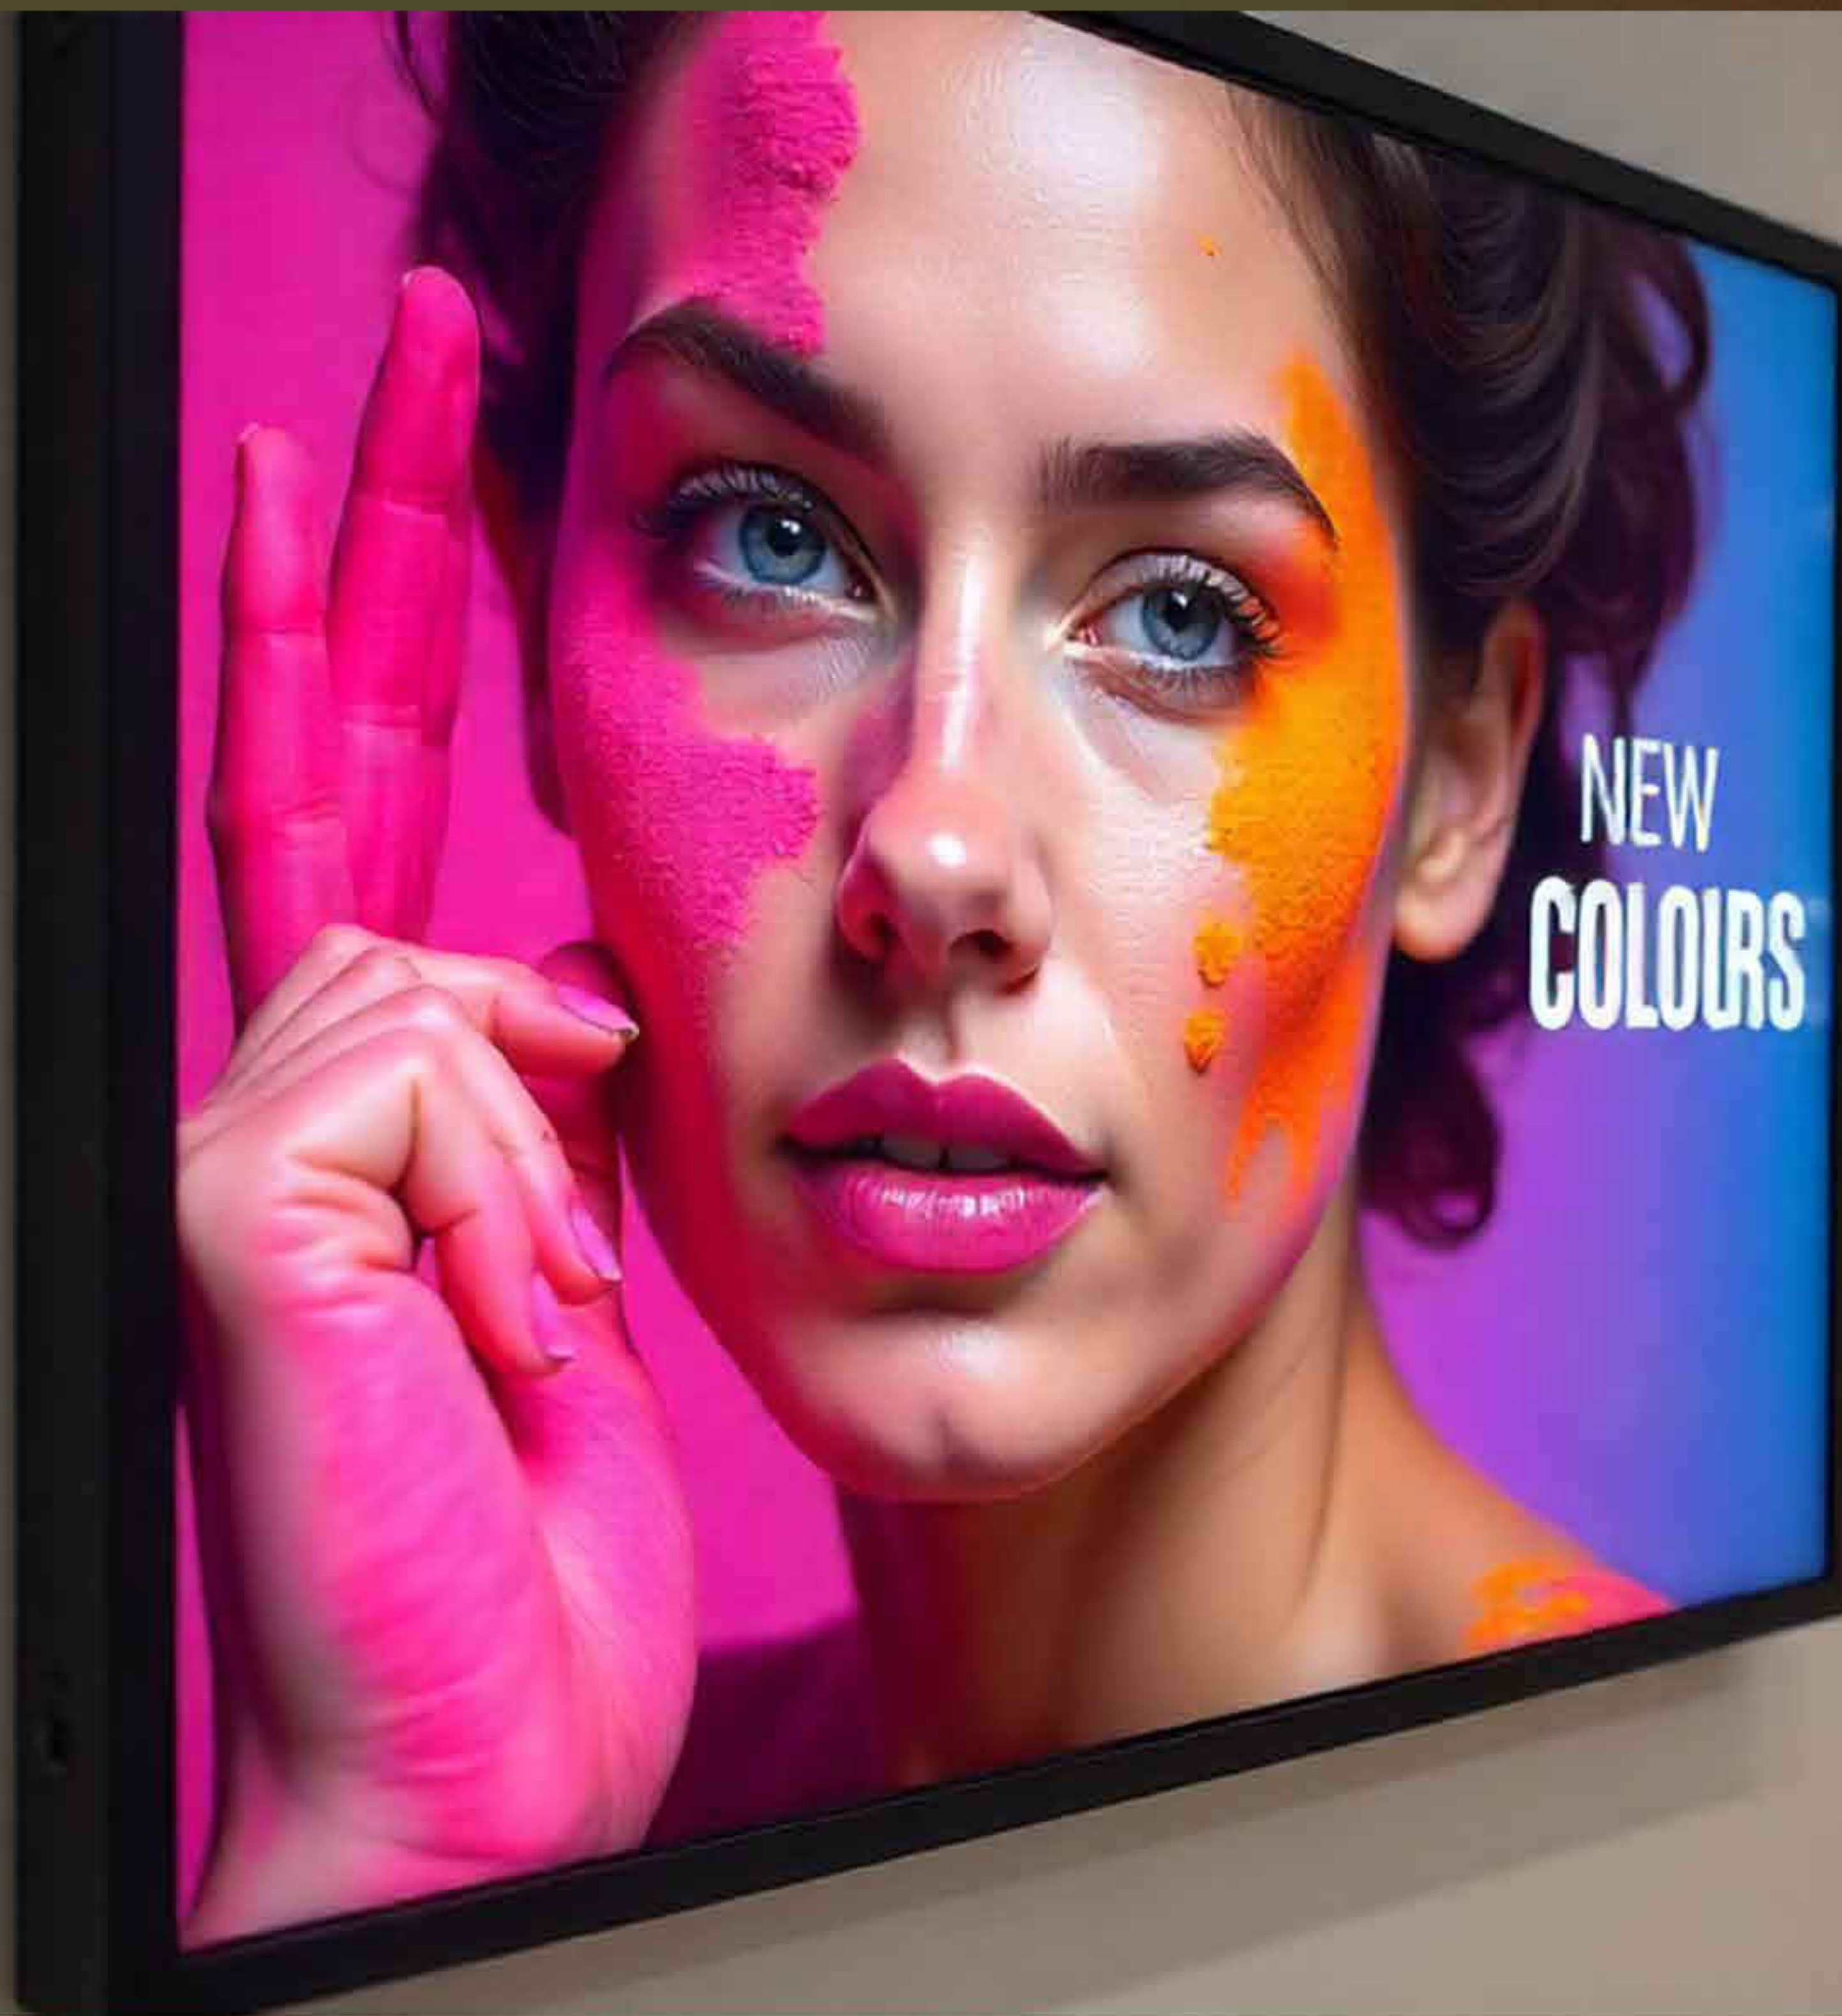

Retail



Transportation

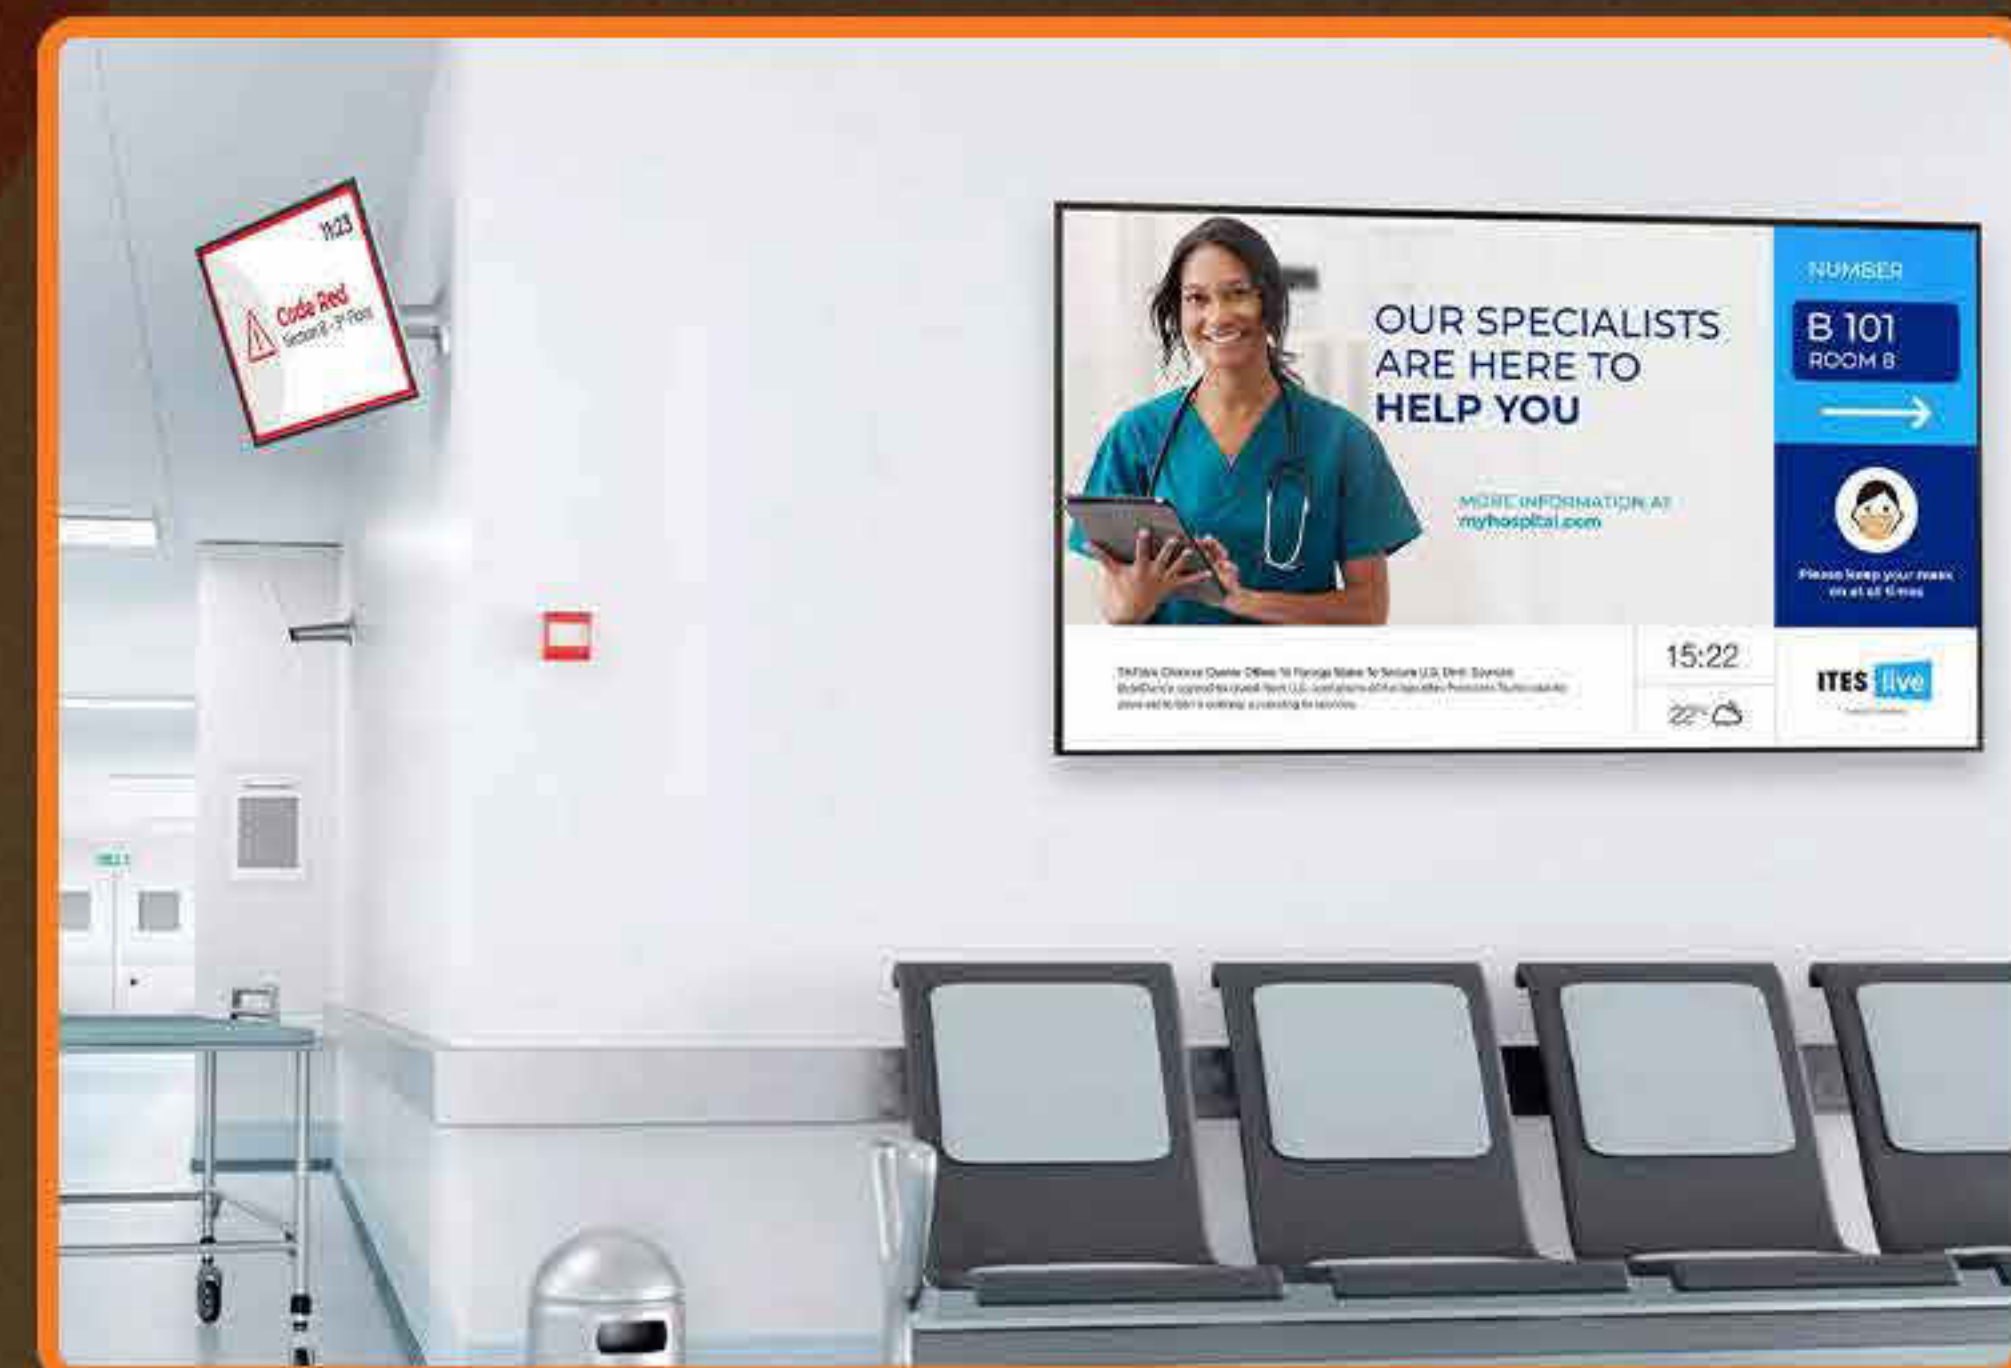

Health Care



Education



Banks



Hospitality

TECHNICAL SPECIFICATIONS

Specification	THAZ86D	THAZ98D	THAZ110D
	Panel		
Screen Size	86"	98"	110"
Panel Technology	IPS	IPS	IPS
Contrast Ratio	1200:1	1200:1	1200:1
Aspect Ratio	16:9	16:9	16:9
Native Resolution	2160p (UHD)	2160p (UHD)	2160p (UHD)
Brightness	500 nits	500 nits	500 nits
Viewing Angle (H × V)	178° × 178°	178° × 178°	178° × 178°
Surface Treatment	Hard Coating (3H), Anti-glare Treatment of Front Polarizer (Haze 1% Typ.)	Hard Coating (3H), Anti-glare Treatment of Front Polarizer (Haze 1% Typ.)	Hard Coating (3H), Anti-glare Treatment of Front Polarizer (Haze 1% Typ.)
Speakers	10W × 2	10W × 2	10W × 2
Orientation	Landscape & Portrait	Landscape & Portrait	Landscape & Portrait
	Connectivity		
Input/Output	HDMI (3), RF, Composite	HDMI (3), RF, Composite	HDMI (3), RF, Composite
Data Point	RJ45, USB, Wi-Fi, Bluetooth	RJ45, USB, Wi-Fi, Bluetooth	RJ45, USB, Wi-Fi, Bluetooth
	Physical Specification		
Monitor Dimensions (W × H × D)	1879.8 × 1080.8 × 67.6 mm	2194.2 × 1249.8 × 75.3 mm	2474 × 1408 × 99 mm
	Environmental Conditions		
Operation Temperature	0°C to 40°C	0°C to 40°C	0°C to 40°C
Operation Humidity	10% to 80%	10% to 80%	10% to 80%
	Power		
Power Supply	100–240V~, 50/60Hz	100–240V~, 50/60Hz	100–240V~, 50/60Hz
Power Type	Built-in	Built-in	Built-in
Typical Power Consumption	250W	380W	500W
	Media Player Compatibility		
OS	Android 11.0	Android 11.0	Android 11.0
Screen Mirroring	Yes	Yes	Yes
	Software Compatibility		
Content Management	Aaztec CMS (optional)	Aaztec CMS (optional)	Aaztec CMS (optional)
Control & Monitoring	Aaztec Link, Remote on/off, Source Change, Volume, Reports, Email Notifications	Aaztec Link, Remote on/off, Source Change, Volume, Reports, Email Notifications	Aaztec Link, Remote on/off, Source Change, Volume, Reports, Email Notifications
Accessories	Remote Control, Power Cord, User Guide	Remote Control, Power Cord, User Guide	Remote Control, Power Cord, User Guide
Certification	BIS / RoHS / CE / FCC	BIS / RoHS / CE / FCC	BIS / RoHS / CE / FCC

*Due to continuous development, Specifications may change without any prior intimation.

